

UKIAH MUNI (UKI)(KUKI) 1 S UTC-8(-7DT) N39°07.56' W123°12.05'

SAN FRANCISCO

617 B NOTAM FILE UKI

L-2G

RWY 15-33: H4423X150 (ASPH) S-28 MIRL 0.3% up N

RWY 15: REIL. VASI(V4L)—GA 3.0° TCH 27'. Trees.

RWY 33: REIL. Trees. Rgt tfc.

SERVICE: S4 FUEL 100LL, JET A OX 1 LGT ACTIVATE MIRL Rwy 15-33, REIL and VASI Rwy 15, REIL Rwy 33—CTAF.

AIRPORT REMARKS: Attended 1600Z†-dusk. No jet acft dep 0600-1500Z†.

Self-svc fuel avbl. For noise abatement calm wind rwy is Rwy 15. Arpt manager requests no VFR straight in apchs to Rwy 15-33 right turn after departure Rwy 33 to avoid overflight of town. Second rotating bcn on mountain 250° and 2 miles from arpt. Ldg fee for all acft over 12,500 lbs. Rwy 15 and Rwy 33 markings faded, worn or missing. Rwy 15-33 asph sfc is in poor cond with large longl and alligator cracking, large uneven patches, rutted and raveling sfc.

AIRPORT MANAGER: 707-467-2855

WEATHER DATA SOURCES: ASOS 119.275 (707) 462-7343.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.2 (OAKLAND RADIO)

RCO 122.35 (OAKLAND RADIO)

OAKLAND CENTER APP/DEP CON 127.8

AIRSPACE: CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE UKI.

MENDOCINO (H) VORTACW 112.3 ENI Chan 70 N39°03.19' W123°16.46' 022° 5.5 NM to fld. 2985/16E.

HIWAS.

KEARN NDB (LOM) 371 UK N39°16.55' W123°14.44' 151° 9.2 NM to fld. Outer marker component status: OM OTS permylly SHUTDOWN.

LOC/DME 109.1 I-UKI Chan 28 Rwy 15. LOM KEARN NDB. Outer marker component status: OM OTS permylly LOC unusable byd 25° r of course. DME unusable byd 25° right of course.

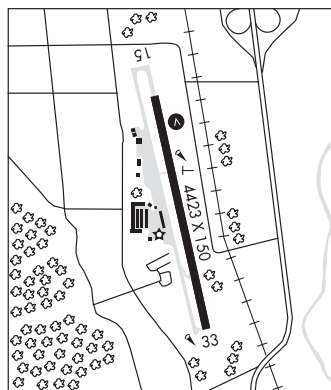

UNIVERSITY (See DAVIS on page 117)

UPLAND

CABLE (CCB)(KCCB) 2 NW UTC-8(-7DT) N34°06.70' W117°41.24'

1444 B TPA-2244(800) NOTAM FILE RAL

RWY 06-24: H3863X75 (ASPH) S-20 MIRL 1.3% up NE

RWY 06: VASI(V2L)—GA 4.0° TCH 34'. Thld dspld 106'.

RWY 24: VASI(V2R)—GA 4.0° TCH 24'. Thld dspld 157'. Road.

SERVICE: S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LGT Rwy 24 VASI unusable byd 5° right and 9° left of centerline. MIRL Rwy 06-24 preset on low ints dusk to 0600Z†, after 0600Z† ACTIVATE—CTAF.

AIRPORT REMARKS: Attended dalgt hrs. Fuel self svc 24 hrs. Rwy 06-24 gross pavement strength provided by arpt operator 12,500 pounds.

AIRPORT MANAGER: (951) 315-9224

WEATHER DATA SOURCES: AWOS-3P 119.525 (909) 985-4731.

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓜ **SOCAL APP/DEP CON** 125.5

CLNC DEL For clnc del call SoCal APP 800-448-3724.

RADIO AIDS TO NAVIGATION: NOTAM FILE POC.

POMONA (L) VORTACW 110.4 POM Chan 41 N34°04.70'

W117°47.22' 053° 5.4 NM to fld. 1266/15E.

VORTAC unusable:

300°-045° byd 20 NM

VOR portion unusable:

280°-300° byd 20 NM blo 13,000'

TACAN AZIMUTH unusable:


280°-300° byd 20 NM blo 14,000'

LOS ANGELES

COPTER

L-3E, 4H, 7C, A

IAF

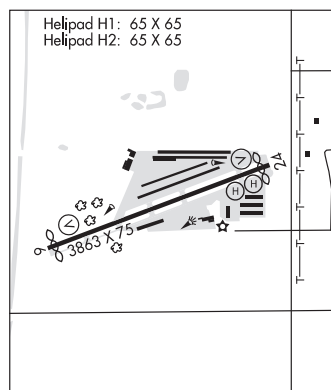

HELIPAD H1: H65X65 (ASPH) PERIMETER LGTS

HELIPAD H2: H65X65 (ASPH-CONC)

HELIPORT REMARKS: ACTIVATE Rwy H1 perimeter lgts—CTAF.