WAAS CH 77613 W04A	APP CRS 037°	Rwy Idg 8505 TDZE 786 Apt Elev 809

RNAV (GPS) Y RWY 4

SAN ANTONIO INTL (SAT)

Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Circling NA west of Rwys 4 and 13R. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C and D visibility to 1⅜.

MALS

MISSED APPROACH: Climb to 3500 direct BISGE and track 030° to SHEPE and hold.

D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

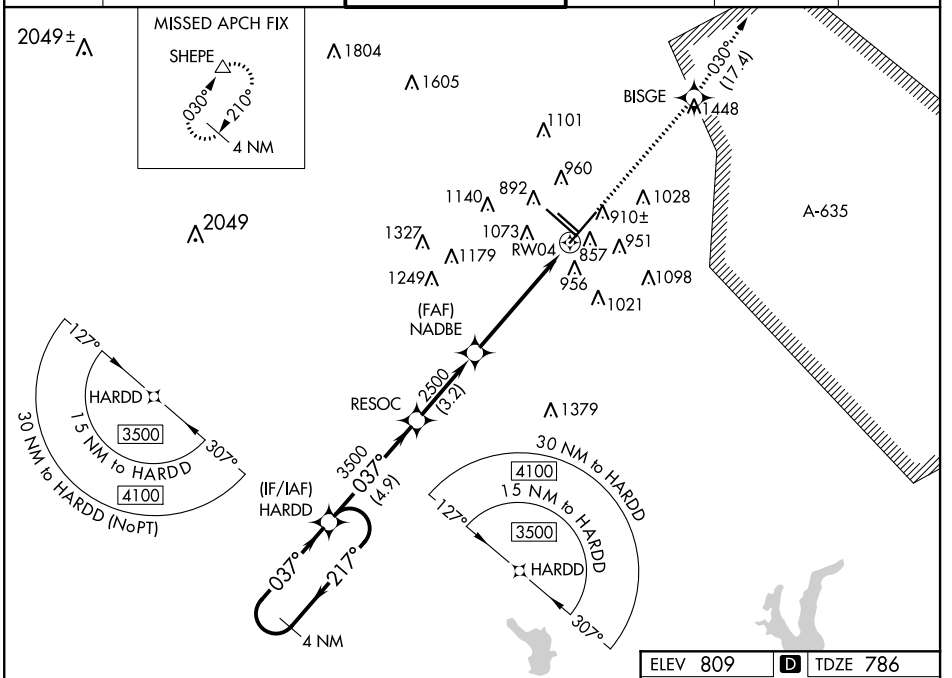

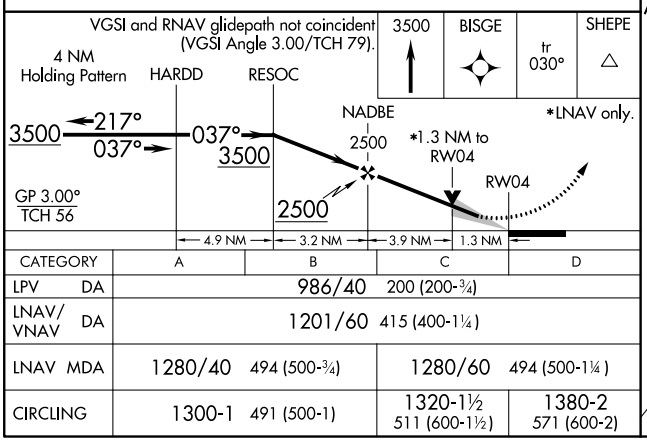

CATEGORY	A	B	C	D
LPV DA	986/40	200 (200-¾)		
LNAV/VNAV DA	1201/60	415 (400-1¼)		
LNAV MDA	1280/40	494 (500-¾)	1280/60	494 (500-1¼)
CIRCLING	1300-1	491 (500-1)	1320-1½ 511 (600-1½)	1380-2 571 (600-2)

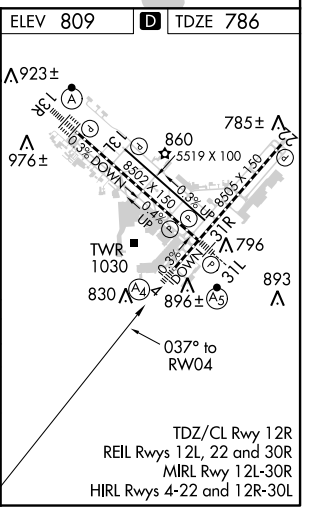

SC-3, 10 OCT 2019 to 07 NOV 2019
SC-3, 10 OCT 2019 to 07 NOV 2019