LOC I-DUJ	APP CRS	Rwy Idg	5503
109.9	252°	TDZE	1817
		Apt Elev	1817

ILS or LOC RWY 25

DUBOIS RGNL (DUJ)

T A Radar Required. When local altimeter setting not received, use Clearfield altimeter setting and increase all DA 96 feet and all MDA 100 feet and S-LOC 25 Cat C and Circling Cat C visibilities ¼ mile and S-LOC 25 Cat D visibility ½ mile. For inoperative MALSR when using Clearfield altimeter setting, increase S-ILS 25 all Cats visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 2400 then climbing right turn to 4000 direct CIP VOR/DME and hold.

ASOS	CLEVELAND CENTER	UNICOM
119.025	126.725 291.65	123.0 (CTAF) L

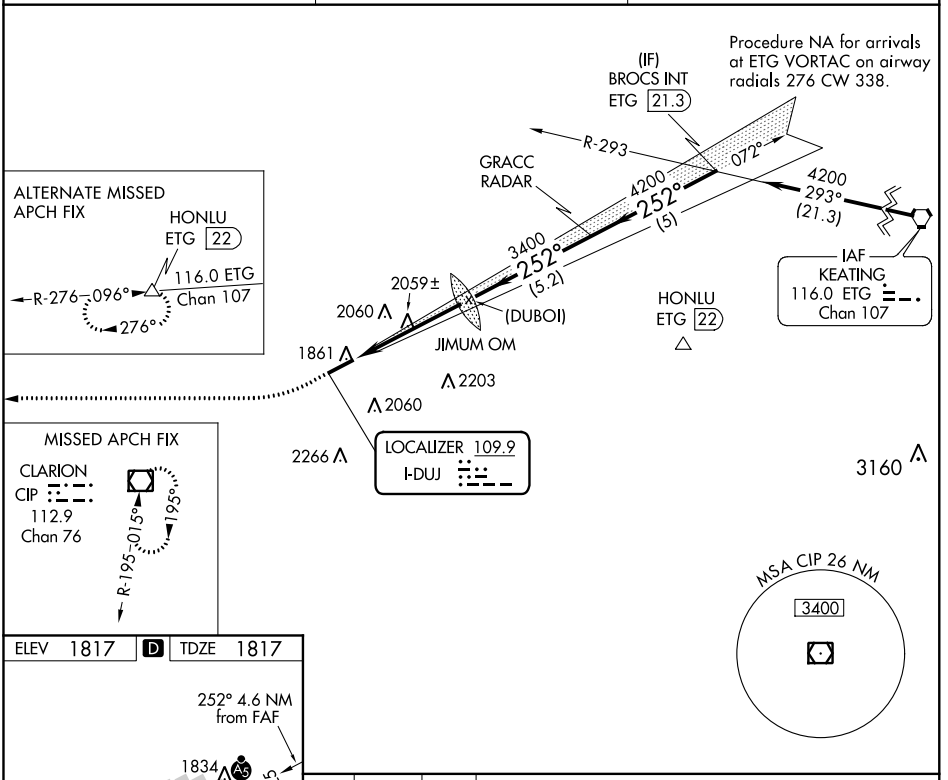

ELEV 1817	D	TDZE 1817



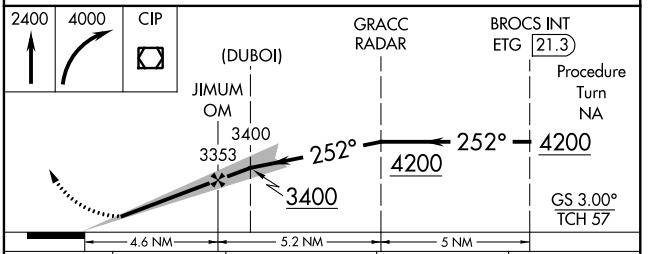

REIL Rwy 7 L
HIRL Rwy 7-25 L

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

CATEGORY	A	B	C	D
S-ILS 25	2017-½		200 (200-½)	
S-LOC 25	2320-½ 503 (600-½)		2320-1 503 (600-1)	
CIRCLING	2320-1 503 (600-1)		2320-1½ 503 (600-1½)	2380-2 563 (600-2)

NE-4, 10 OCT 2019 to 07 NOV 2019
NE-4, 10 OCT 2019 to 07 NOV 2019