


LOC I-ARR 108.9	APP CRS 090°	Rwy Idg 6501	TDZE 707
		Apt Elev 712	

ILS or LOC RWY 9

AURORA MUNI (A.R.R.)

RADAR required for procedure entry.		MALSRL	MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 090° and on DPA VOR/DME R-185 to VAINS INT/DPA 7.9 DME and hold, continue climb-in-hold to 3000.	
For inop ALS, increase S-LOC 9 Cat C/D visibilities to 1 3/8 SM.				
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER ★ 120.6 (CTAF)	GND CON 121.7	CLNC DEL 121.7 (When tower closed)
			UNICOM 122.95 123.5	

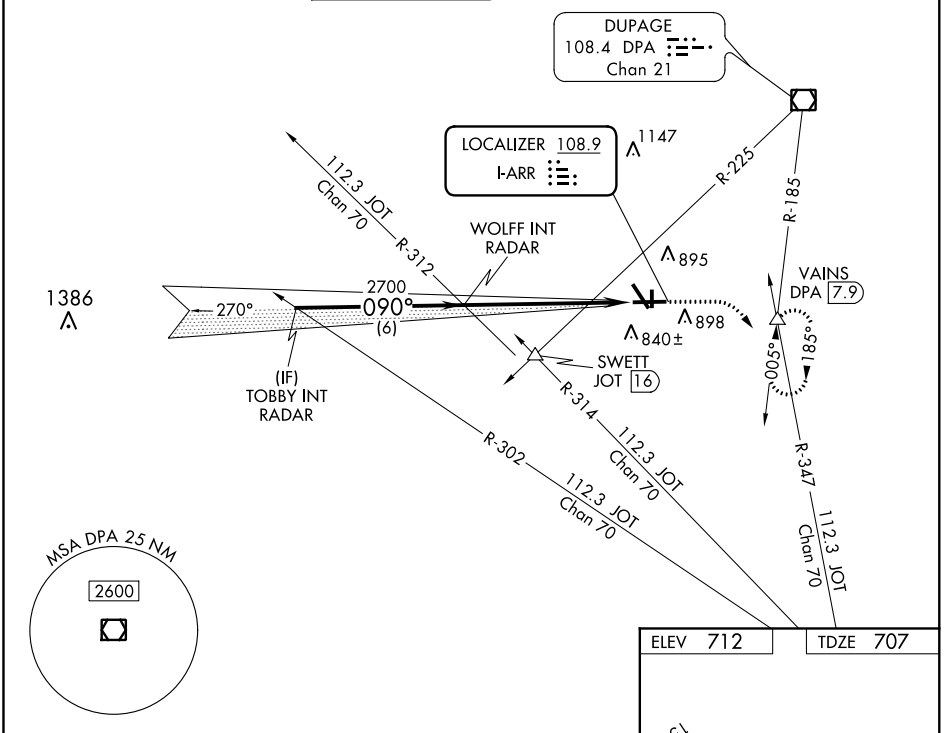

EC-3, 10 OCT 2019 to 07 NOV 2019

EC-3, 10 OCT 2019 to 07 NOV 2019

TOBBY INT RADAR	WOLFF INT RADAR	1200	3000	VAINS
		↑	hdg 090°	DPA R-185
CATEGORY	A	B	C	D
S-ILS 9	907-1/2 200 (200-1/2)			
S-LOC 9	1220-1/2 513 (600-1/2)		1220-1 513 (600-1)	
CIRCLING	1220-1 508 (600-1)		1220-1 1/2 508 (600-1 1/2)	
			1320-2 608 (700-2)	

ELEV 712	TDZE 707
----------	----------

MIRL Rwy 18-36
 HIRL Rwy 15-33 and 9-27
 REIL Rwy 15, 18, 27, and 36
 FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02