LOC/DME I-ROF	APP CRS	Rwy ldg	5503
111.15	328°	TDZE	705
Chan 48 (Y)		Apt Elev	712

LOC RWY 33
AURORA MUNI (ARR)

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¾ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON	CLNC DEL	UNICOM
125.85	133.5 349.0	120.6 (CTAF) L	121.7	121.7 (When tower closed)	122.95 123.5

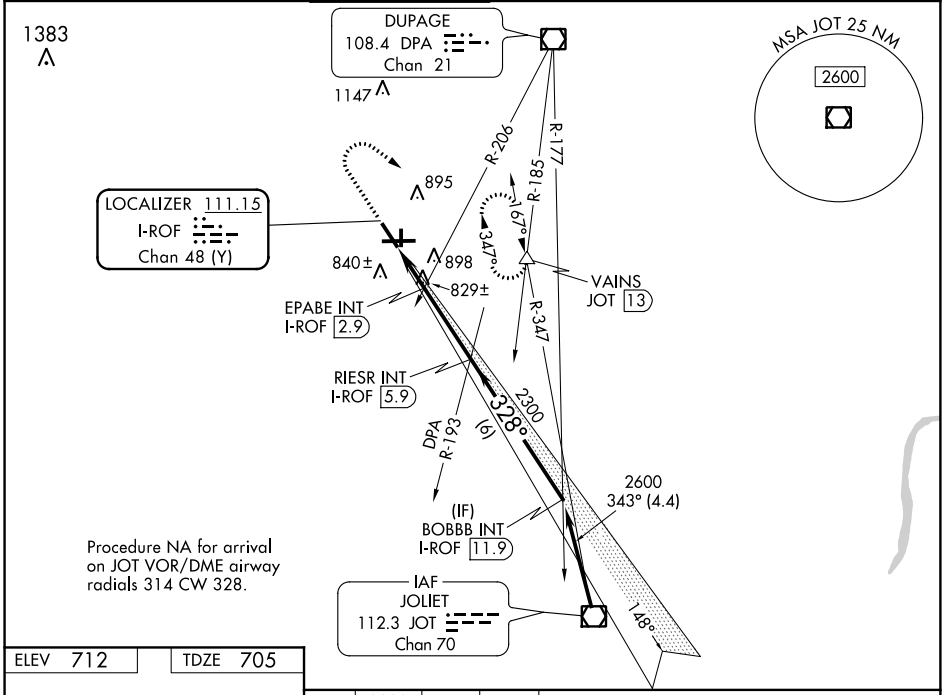

ELEV 712 | TDZE 705



HIRL Rwys 15-33 and 9-27 L
MIRL Rwys 18-36 L
REIL Rwys 15, 18, 27, and 36 L

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

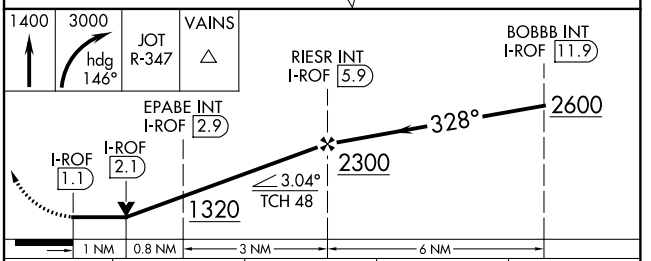

CATEGORY	A	B	C	D
S-LOC 33	1320-½ 615 (700-½)		1320-1⅜ 615 (700-1⅜)	
C CIRCLING	1320-1 608 (700-1)		1320-1¾ 608 (700-1¾)	1320-2 608 (700-2)
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 33	1080-½ 375 (400-½)		1080-⅝ 375 (400-⅝)	
C CIRCLING	1200-1 488 (500-1)		1200-1½ 488 (500-1½)	1320-2 608 (700-2)

EC-3, 10 OCT 2019 to 07 NOV 2019
EC-3, 10 OCT 2019 to 07 NOV 2019