

WAAS CH 65817 W33A	APP CRS 330°	Rwy Idg 10702 TDZE 17 Apt Elev 17
--	------------------------	--




RNAV (GPS) RWY 33

CHENNAULT INTL (CWF)

⚠ Baro-VNAV NA when using Lake Charles Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. VDP NA with Lake Charles Rgnl altimeter setting. When local altimeter not received, use Lake Charles Rgnl altimeter setting and increase all DA 16 feet and all MDA 20 feet.

MISSED APPROACH:
Climb to 2000 direct CEVKU and hold.

ATIS 120.0	LAKE CHARLES APP CON * 119.8 282.3	CHENNAULT TOWER * 124.2 (CTAF) 0 290.4	GND CON 121.65 275.8	UNICOM 122.95
----------------------	--	---	--------------------------------	-------------------------

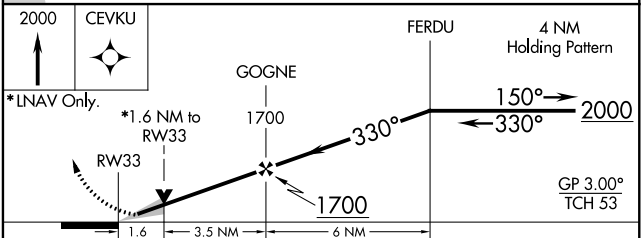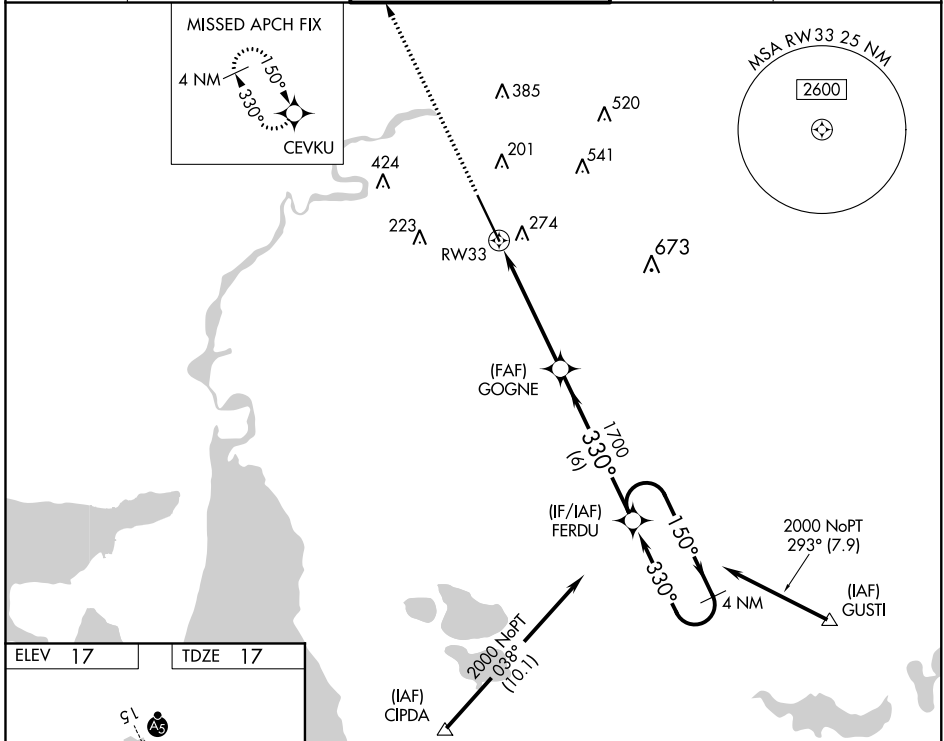

CATEGORY	A	B	C	D
LPV DA		217-3/4	200 (200-3/4)	
LNAV/VNAV DA		494-13/4	477 (500-13/4)	
LNAV MDA	580-1	563 (600-1)	580-1 1/2 563 (600-1 1/2)	580-1 3/4 563 (600-1 3/4)
CIRCLING	640-1	623 (700-1)	640-1 3/4 623 (700-1 3/4)	640-2 623 (700-2)

SC-4, 10 OCT 2019 to 07 NOV 2019

SC-4, 10 OCT 2019 to 07 NOV 2019