

| | | | |
|---------------------------|------------------------|-----------------------------|-----------------------------------------|
| LOC I-JAN 110.5 | APP CRS 159° | Rwy Idg TDZE Apt Elev | 8500 312 346 |
|---------------------------|------------------------|-----------------------------|-----------------------------------------|


ILS or LOC RWY 16L

JACKSON-MEDGAR WILEY EVERS INTL (JAN)




ASR Circling NA for Cat E southwest of Rwy 16R-34L. When local altimeter setting not received, use Hawkins Field altimeter setting and increase all DA 19 feet and all MDA 20 feet. For inop ALS, increase S-ILS 16L Cat E visibility to RVR 4000 and increase S-LOC 16L Cats C/D/E visibility to 1 $\frac{3}{8}$ SM. For inop ALS when using Hawkins Field altimeter setting, increase S-16L Cat E visibility to RVR 4000 and increase S-LOC 16L Cats C/D/E visibility to 1 $\frac{1}{2}$ SM. Procedure turn NA for Cat E.

ALSF-2 MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on heading 090° and MHZ VORTAC R-134 to RAKIN INT/16.5 DME and hold.

| | | | | | |
|-----------------------|-----------------------------------------|------------------------------------------------|-------------------------------|-----------------|-------------------------|
| ATIS 121.05 | JACKSON APP CON * 123.9 317.7 | JACKSON TOWER * 120.9 (CTAF) 0 352.0 | GND CON 121.7 348.6 | 120.7 0* | UNICOM 122.95 |
|-----------------------|-----------------------------------------|------------------------------------------------|-------------------------------|-----------------|-------------------------|

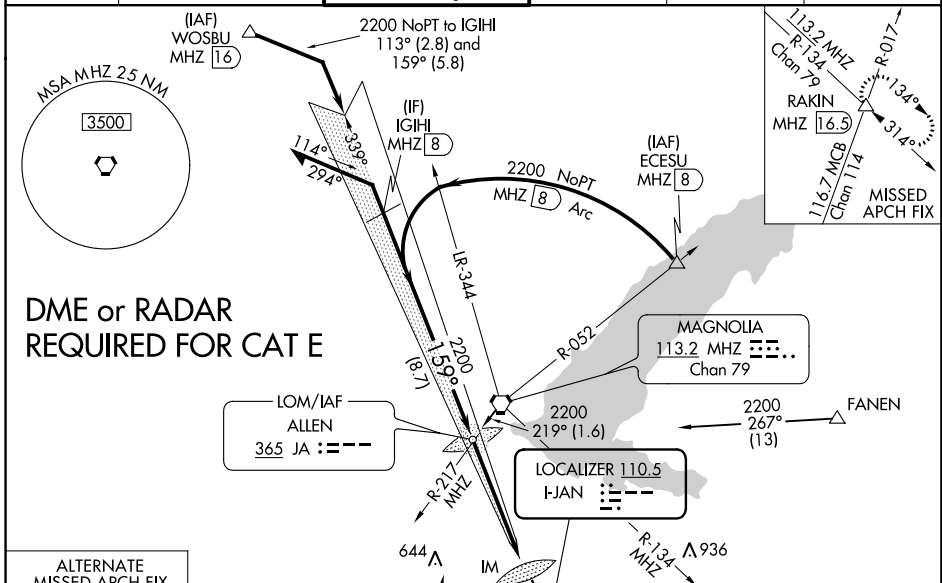

DME or RADAR REQUIRED FOR CAT E

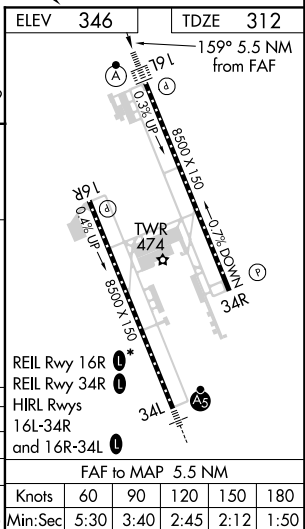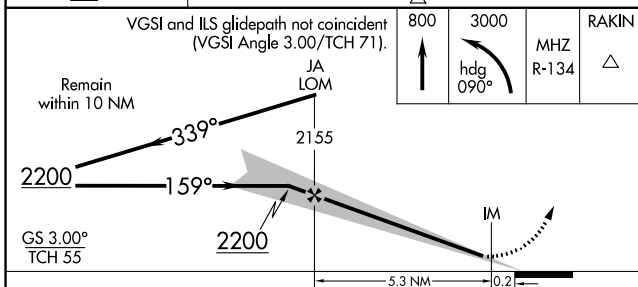

| | | | | | |
|-------------------|----------------------------------|---------------------------|---------------------------------------------------|----------------------|----------------------------------------------------|
| CATEGORY | A | B | C | D | E |
| S-ILS 16L | 512/18 200 (200- $\frac{1}{2}$) | | | | |
| S-LOC 16L | 820/24 | 508 (500- $\frac{1}{2}$) | 820/55 508 (500-1) | | |
| CIRCLING | 880-1 | 534 (600-1) | 900-1 $\frac{1}{2}$ 554 (600-1 $\frac{1}{2}$) | 960-2 614 (700-2) | 1040-2 $\frac{1}{2}$ 694 (700-2 $\frac{1}{2}$) |
| FAF to MAP 5.5 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |

SC-4, 10 OCT 2019 to 07 NOV 2019

SC-4, 10 OCT 2019 to 07 NOV 2019