

WAAS CH <b>53329</b> <b>W12A</b>	APP CRS <b>119°</b>	Rwy Idg TDZE <b>1516</b> Apt Elev <b>1516</b>	<b>4499</b>
--	------------------------	---	-------------


# RNAV (GPS) RWY 12

CLEARFIELD-LAWRENCE (FIG)

**⚠** DME/DME RNP-0.3 NA. Helicopter visibility reduction below  $\frac{3}{4}$  SM NA. VDP NA with Dubois Rgnl altimeter setting. When local altimeter setting not received, use Dubois Rgnl altimeter setting and increase all MDA 100 feet, increase LP Cat B visibility  $\frac{1}{4}$  mile and Cat C visibility  $\frac{1}{8}$  mile, increase LNAV Cat C visibility  $\frac{1}{2}$  mile and increase Circling Cats A/C visibility  $\frac{1}{4}$  mile.

**⚠** MISSED APPROACH: Climb to 4000 direct EBUME and hold.



ASOS <b>119.275</b>	NEW YORK CENTER <b>134.8 338.3</b>	UNICOM <b>122.725 (CTAF) ①</b>
------------------------	---------------------------------------	-----------------------------------

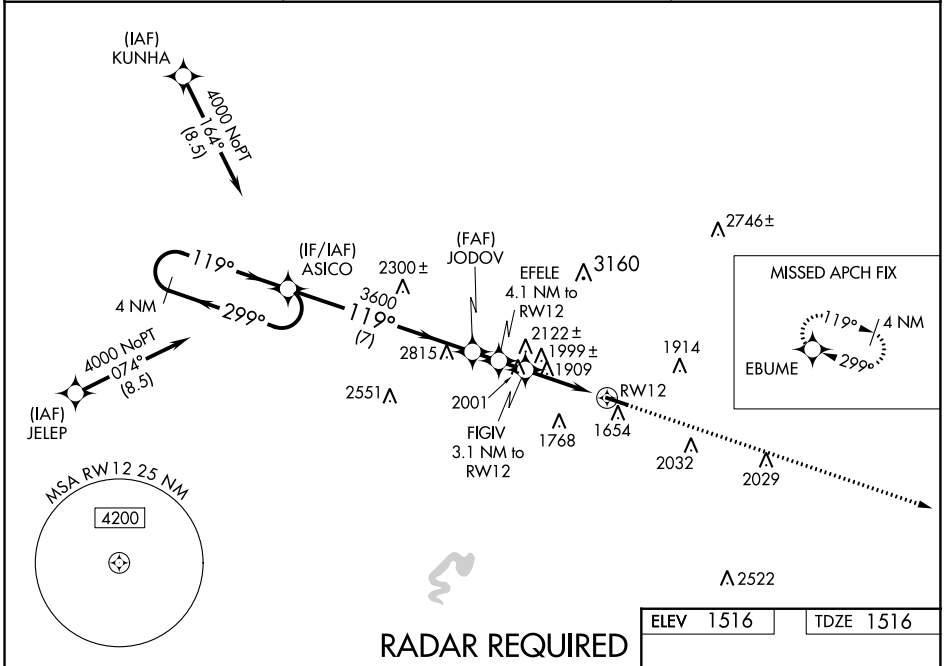

NE-4, 10 OCT 2019 to 07 NOV 2019

NE-4, 10 OCT 2019 to 07 NOV 2019

## RADAR REQUIRED

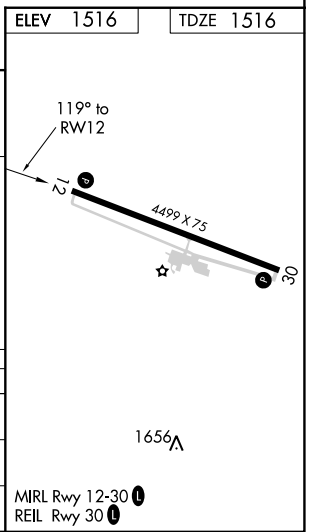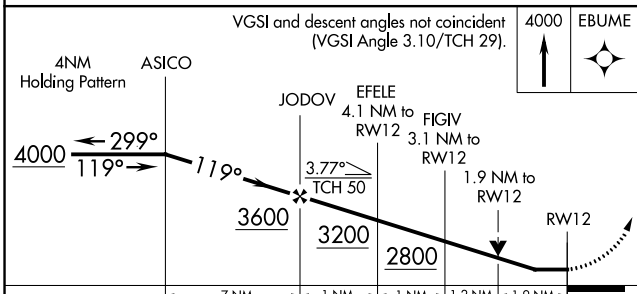

CATEGORY	A	B	C	D
LP MDA	2160-1	644 (700-1)	2160-1 $\frac{7}{8}$ 644 (700-1 $\frac{7}{8}$ )	NA
LNAV MDA	2260-1 744 (800-1)	2260-1 $\frac{1}{4}$ 744 (800-1 $\frac{1}{4}$ )	2260-2 744 (800-2)	NA
CIRCLING	2260-1 744 (800-1)	2260-1 $\frac{1}{4}$ 744 (800-1 $\frac{1}{4}$ )	2260-2 $\frac{1}{4}$ 744 (800-2 $\frac{1}{4}$ )	NA