RNAV (RNP) Z RWY 22

LAGUARDIA (LGA)

APP CRS	Rwy Idg	7001
224°	TDZE	12
	Apt Elev	21

For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). RF required. GPS required. For inop ALS, increase RNP 0.30 visibility to 1⅜ SM.

NA

ALSF-1

MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 540.

D-ATIS ARR	NEW YORK APP CON	LAGUARDIA TOWER	GND CON	CLNC DEL	CPDLC
D-ATIS DEP					
125.95	120.8 263.0	118.7 263.0	121.7 263.0	135.2	
127.05					

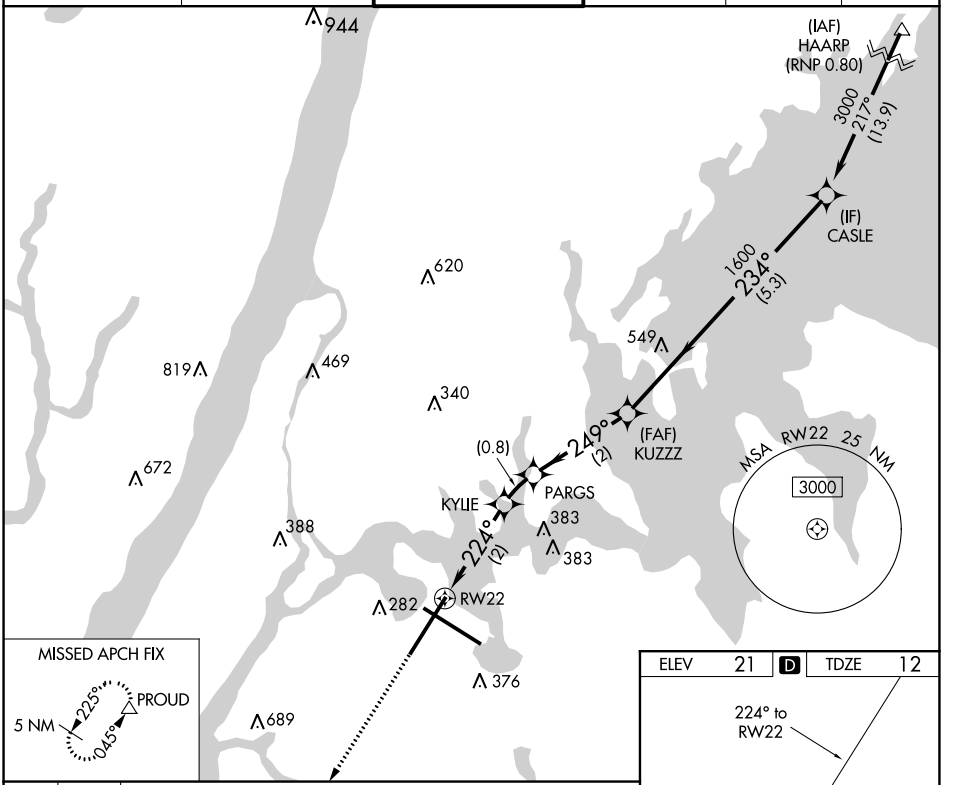

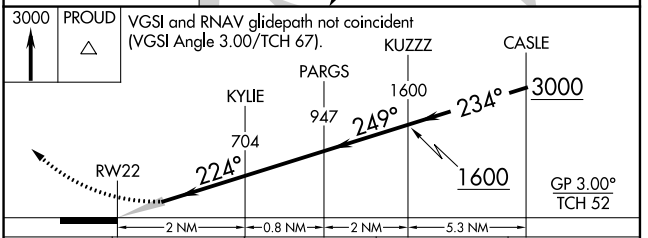

CATEGORY	A	B	C	D
RNP 0.30 DA*		384/40	372 (400-¾)	
RNP 0.30 DA		437/50	425 (500-1)	

AUTHORIZATION REQUIRED

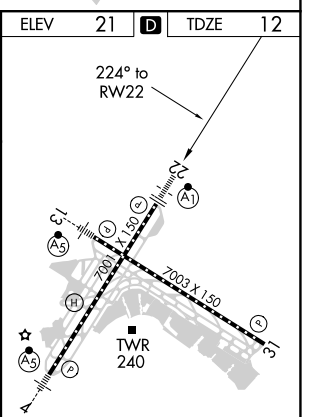

HIRL Rwys 4-22 and 13-31
REIL Rwy 31
TDZ/CL Rwys 4, 13, and 22

NE-2, 10 SEP 2020 to 08 OCT 2020
NE-2, 10 SEP 2020 to 08 OCT 2020