

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 08 OCT 2020 to 05 NOV 2020

TOP ALTITUDE: ASSIGNED BY ATC

- AWOS-3
- 119.950
- CLNC DEL
- 121.85 (when tower closed)
- GND CON
- 121.85
- COUNTY TOWER *
- 118.5 (CTAF)
- CLEVELAND DEP CON
- 125.35 346.325

TAKEOFF MINIMUMS:


Rwys 6, 24: Standard with a minimum climb of 500' per NM to 1400.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

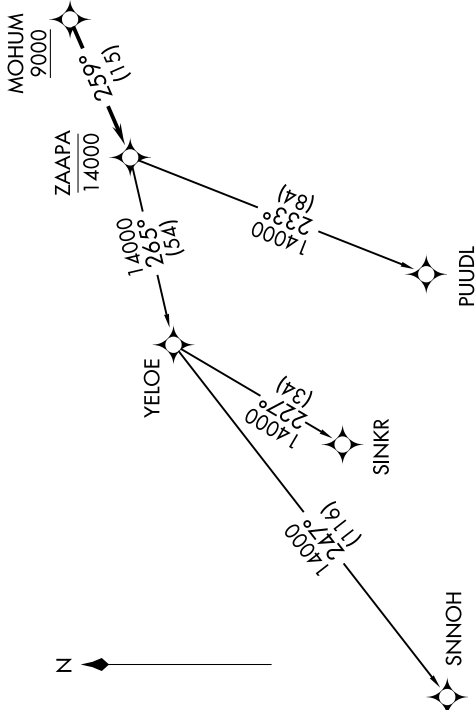

NOTE: Chart not to scale.

ZAAPA FIVE DEPARTURE (RNAV)

(ZAAPA5.ZAAPA) 26MAR20

EC-2, 08 OCT 2020 to 05 NOV 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 057° to 1900, then on heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 24: Climb on heading 237° to 1900, then right turn heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA5.PUUDL)

SINKR TRANSITION (ZAAPA5.SINKR)

SNNOH TRANSITION (ZAAPA5.SNNOH)