LOC I-YKN	APP CRS	Rwy Idg	6095
109.5	313°	TDZE	1285
		Apt Elev	1306

ILS or LOC RWY 31

CHAN GURNEY MUNI (YKN)

T
NA When VGSI inop, Circling Rwy 19 NA at night. When local altimeter setting not received, use Sioux Falls altimeter setting and increase all DA 130 feet and all MDA 140 feet, and increase S-ILS 31 visibility all Cats ⅛ mile, S-LOC 31 Cats C and D ⅜ mile, and Circling Cat C ⅜ mile, Cat D ¼ mile. NODPE fix minimums: increase S-LOC 31 visibility Cats C and D ⅜ mile, Circling Cats C and D ¼ mile. For inoperative MALSR when using Sioux Falls altimeter setting, increase S-ILS 31 all Cats visibility to 1⅛ mile.

MALSR

MISSED APPROACH: Climb to 3000 then climbing right turn to 3200 direct YKN VOR/DME and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.05	125.025 235.625	122.8 (CTAF)

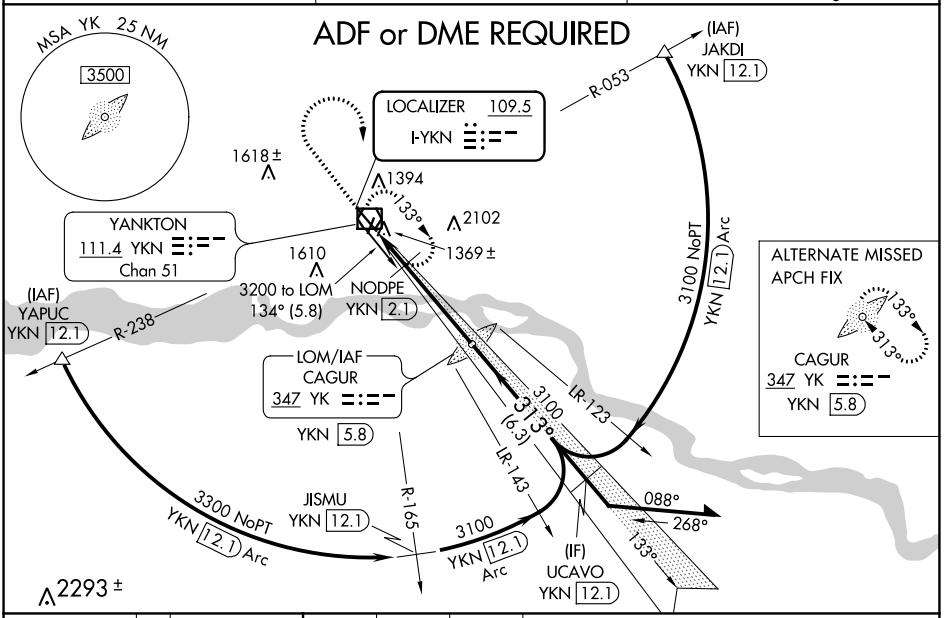

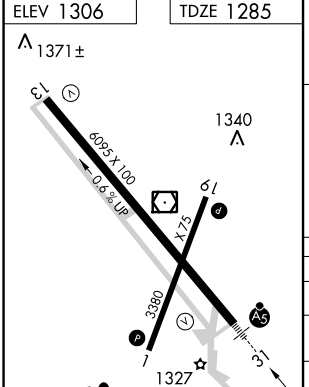

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

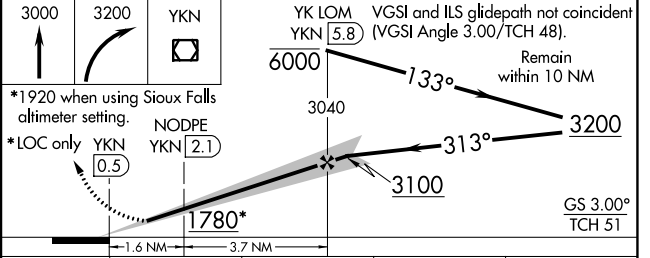

CATEGORY	A	B	C	D
S-ILS 31	1485-½ 200 (200-½)			
S-LOC 31	1780-½ 495 (500-½)		1780-1 495 (500-1)	
CIRCLING	1780-1 474 (500-1)		1780-1½ 474 (500-1½)	1860-2 554 (600-2)
NODPE FIX MINIMUMS (DME REQUIRED)				
S-LOC 31	1620-½ 335 (400-½)		1620-⅝ 335 (400-⅝)	
CIRCLING	1780-1 474 (500-1)		1780-1½ 474 (500-1½)	1860-2 554 (600-2)

NC-1, 08 OCT 2020 to 05 NOV 2020
NC-1, 08 OCT 2020 to 05 NOV 2020