LOC I-GBY	APP CRS	Rwy Idg	7221
109.7	125°	TDZE	1182
		Apt Elev	1182

ILS or LOC RWY 12

SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FIELD (MML)

ADF required.
When local altimeter setting not received, use Tracy Muni altimeter setting and increase all DAs/MDAs 60 feet and S-LOC 12 Cats C/D visibility ¼ mile.
For inoperative MALSR when using Tracy Muni altimeter setting, increase S-ILS 12 visibility to 1 mile all Cats.

NA

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct GARNO LOM/MML 4.9 DME and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GCO	UNICOM
120.150	127.1 290.2	121.725	122.8 (CTAF) L

ADF or DME REQUIRED

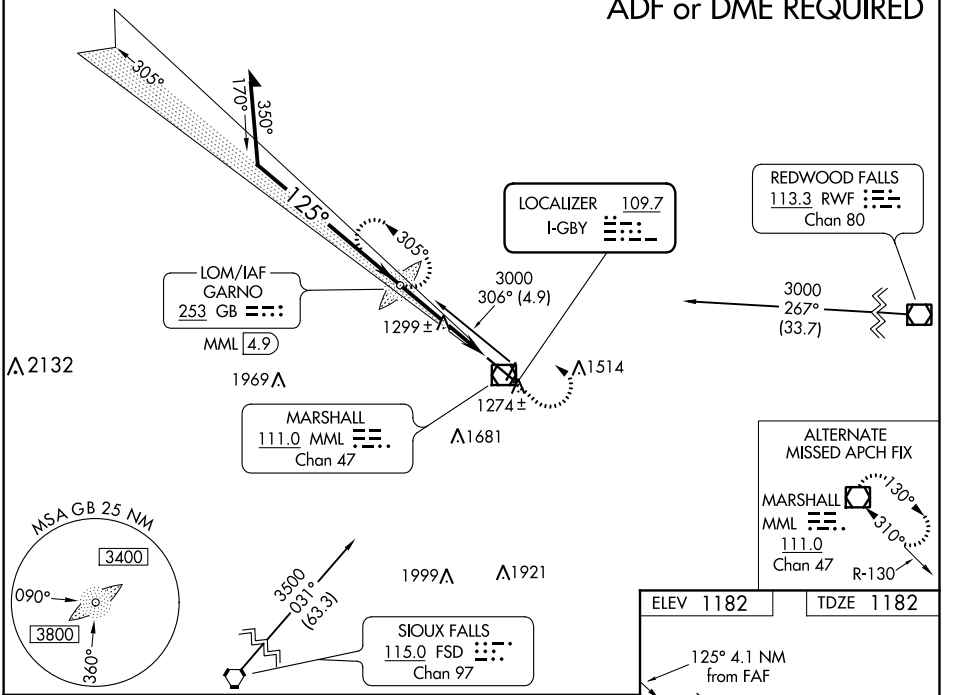

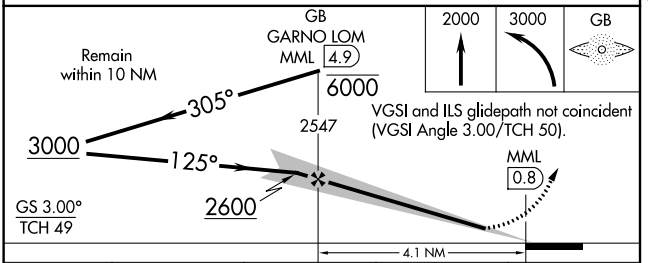



CATEGORY	A	B	C	D
S-ILS 12	1382-½ 200 (200-½)			
S-LOC 12	1560-½ 378 (400-½)			1560-¾ 378 (400-¾)
CIRCLING	1640-1 458 (500-1)		1640-1½ 458 (500-1½)	1740-2 558 (600-2)

HIRL Rwy 12-30 L
REIL Rwys 2 and 20 L
MIRL Rwy 2-20 L

FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

NC-1, 08 OCT 2020 to 05 NOV 2020
NC-1, 08 OCT 2020 to 05 NOV 2020