RNAV (GPS) RWY 36

MOBILE DOWNTOWN (BFM)

WAAS	APP CRS	Rwy Idg	7800
CH 56511	001°	TDZE	26
W36A		Apt Elev	26

T A DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mobile RgnI altimeter setting and increase all DA 50 feet and MDA 60 feet and increase LPV visibility all Cats ¼ mile, increase LNAV/VNAV visibility all Cats ⅛ mile, increase LNAV Cat C/D visibility ¼ mile, and increase Circling Cat C visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 13°C (56°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Mobile RgnI altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2100 direct WORIR and hold.

ATIS	MOBILE APP CON ★	DOWNTOWN TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

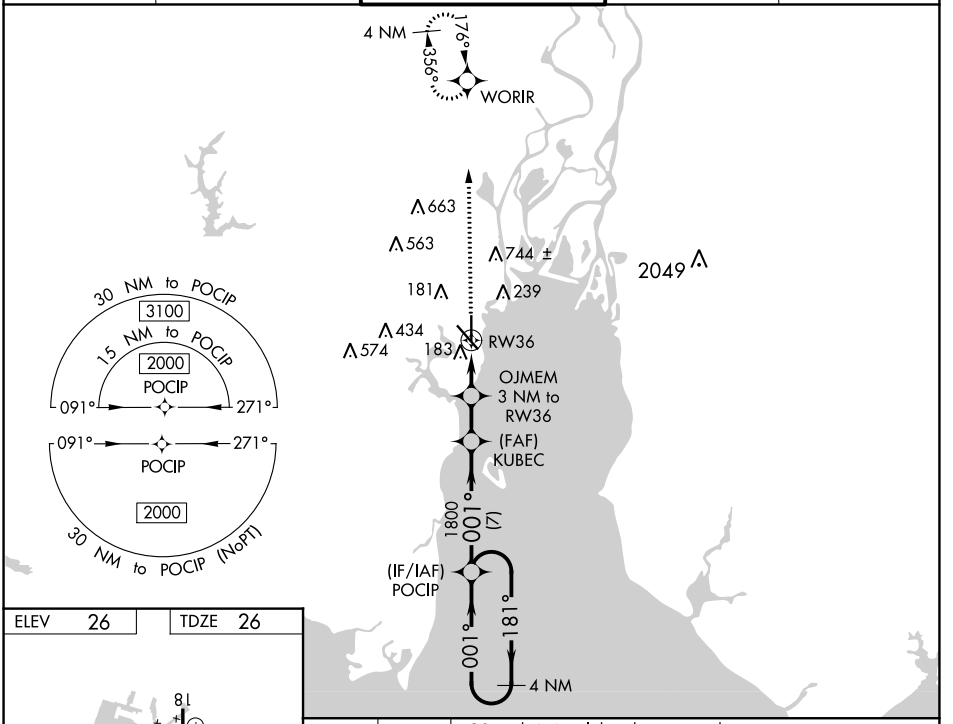

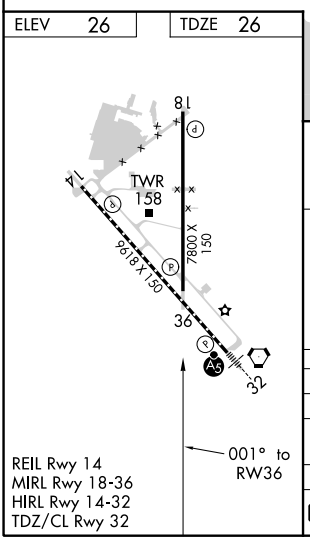

REIL Rwy 14
MIRL Rwy 18-36
HIRL Rwy 14-32
TDZ/CL Rwy 32

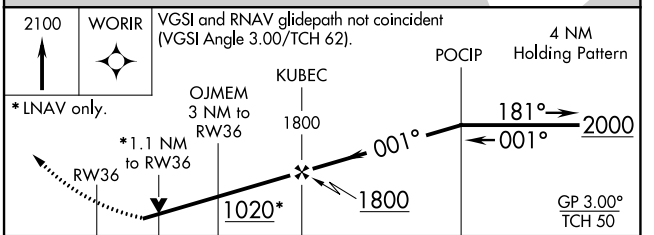

CATEGORY	A	B	C	D
LPV DA	308-⅞		282 (300-⅞)	
LNAV/VNAV DA	470-1½		444 (500-1½)	
LNAV MDA	440-1	414 (500-1)	440-1⅛	414 (500-1⅛)
C CIRCLING	680-1	654 (700-1)	680-1¾ 654 (700-1¾)	1100-3 1074 (1100-3)

SE-4, 05 NOV 2020 to 03 DEC 2020
SE-4, 05 NOV 2020 to 03 DEC 2020