RNAV (GPS) RWY 25

GWINNETT COUNTY-BRISCOE FIELD (LZU)

WAAS	APP CRS	Rwy Idg	6000
CH 82021	249°	TDZE	1038
W25A		Apt Elev	1062

Baro-VNAV NA when using Winder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Winder altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C/D visibility ¼ mile. For inop MALSR, increase LNAV Cat C/D visibility to 1⅜ mile. For inop MALSR when using Winder altimeter setting; increase LNAV/VNAV all Cats visibility to 1⅞ mile and LNAV Cat C/D visibility to 1⅝ mile.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 direct TUCKR and hold.

ATIS	ATLANTA APP CON	GWINNETT TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
132.275	126.975 239.275	124.1 (CTAF) L	121.8	121.8	134.0 (When twr closed)	123.05

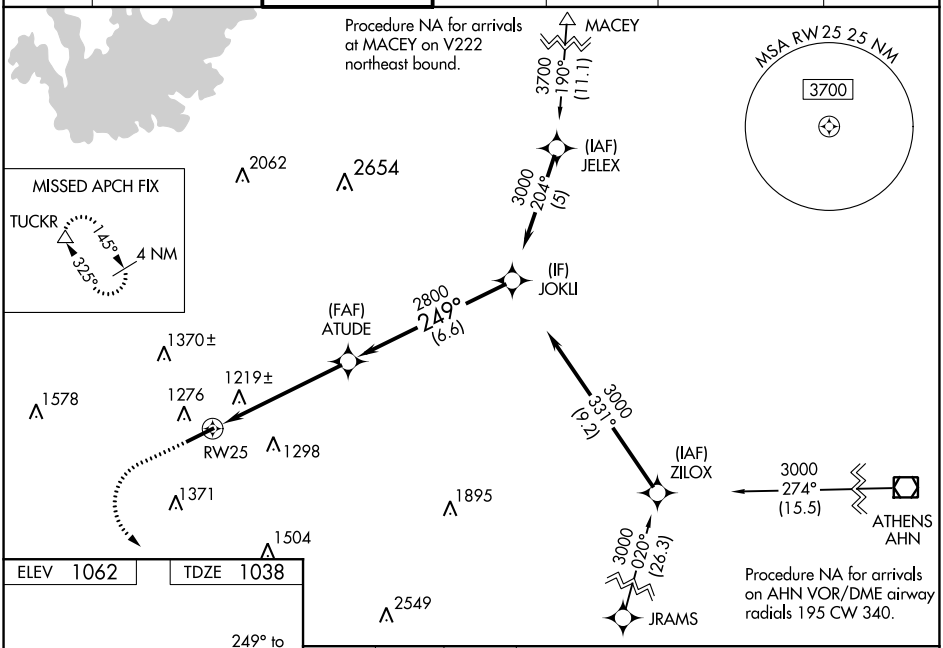

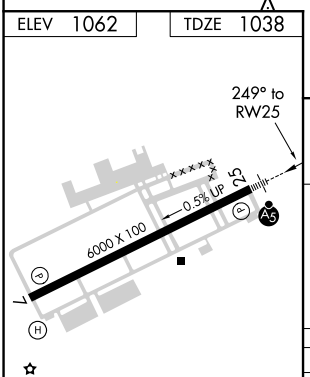

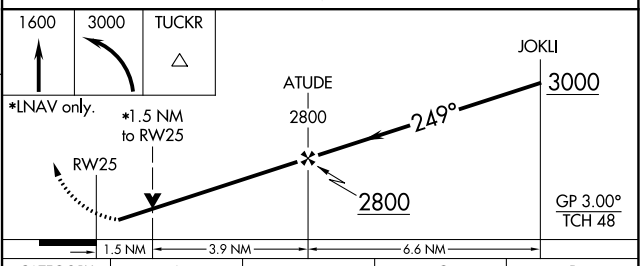

CATEGORY	A	B	C	D
LPV DA	1238-½	200 (200-½)		
LNAV/VNAV DA	1544-1¼	506 (500-1¼)		
LNAV MDA	1540-½	502 (500-½)	1540-1	502 (500-1)
CIRCLING	1640-1	578 (600-1)	1640-1½ 578 (600-1½)	1700-2 638 (700-2)

SE-4, 05 NOV 2020 to 03 DEC 2020
SE-4, 05 NOV 2020 to 03 DEC 2020