RNAV (GPS) RWY 36

LAWRENCEVILLE-VINCENNES INTL (LWV)

WAAS	APP CRS	Rwy Idg	5199
CH 99528	360°	TDZE	428
W36A		Apt Elev	430

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). Rwy 36 Straight-in and Circling minimums NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Mount Carmel altimeter setting; increase all DA 26 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats ⅛ mile and LNAV visibility Cats C and D ⅛ mile.

MISSED APPROACH: Climb to 2600 direct JEBDU and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 343.7	122.8 (CTAF) L

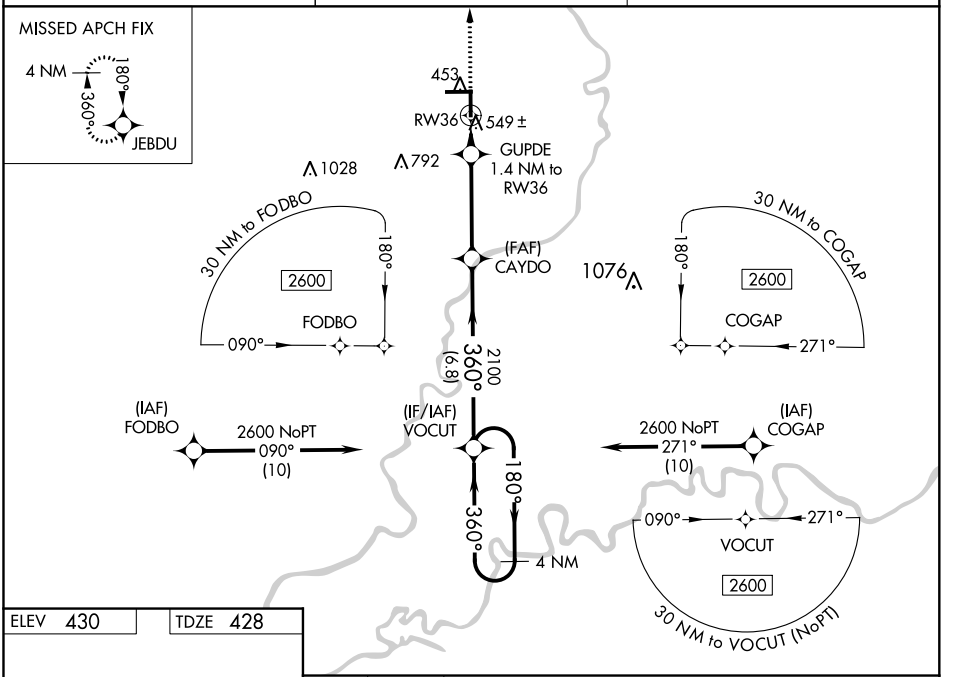

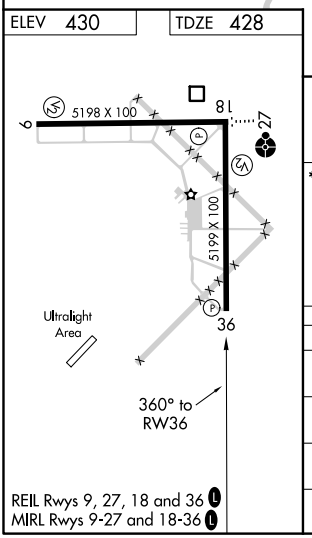

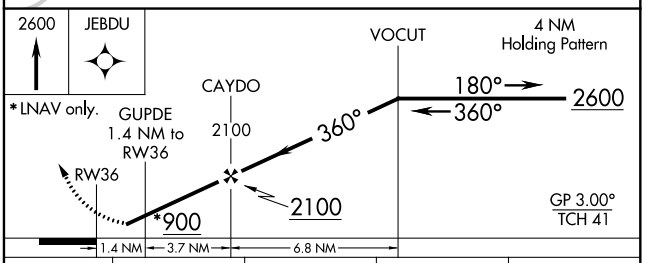

CATEGORY	A	B	C	D
LPV DA	678-1 250 (300-1)			
LNAV/VNAV DA	824-1⅜ 396 (400-1⅜)			
LNAV MDA	800-1 372 (400-1)			
CIRCLING	880-1 450 (500-1)		900-1½ 470 (500-1½)	980-2 550 (600-2)

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021