RNAV (GPS) RWY 32

SOUTHERN WISCONSIN RGNL (JVL)

APP CRS	Rwy Idg	7302
316°	TDZE	806
	Apt Elev	808

RNP APCH.

T NA — Circling Rwy 18 NA at night. Baro-VNAV and VDP NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -16° C or above 54°C. When local altimeter setting not received use Rockford altimeter setting and increase all DA/MDAs 80 feet. For inop ALS, increase LNAV Cat A/B visibility to 1 SM, and Cat C/D to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 3100 direct TAYOR and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
128.25	121.0 327.0	118.8 (CTAF) L 225.4	121.65	121.65	122.95

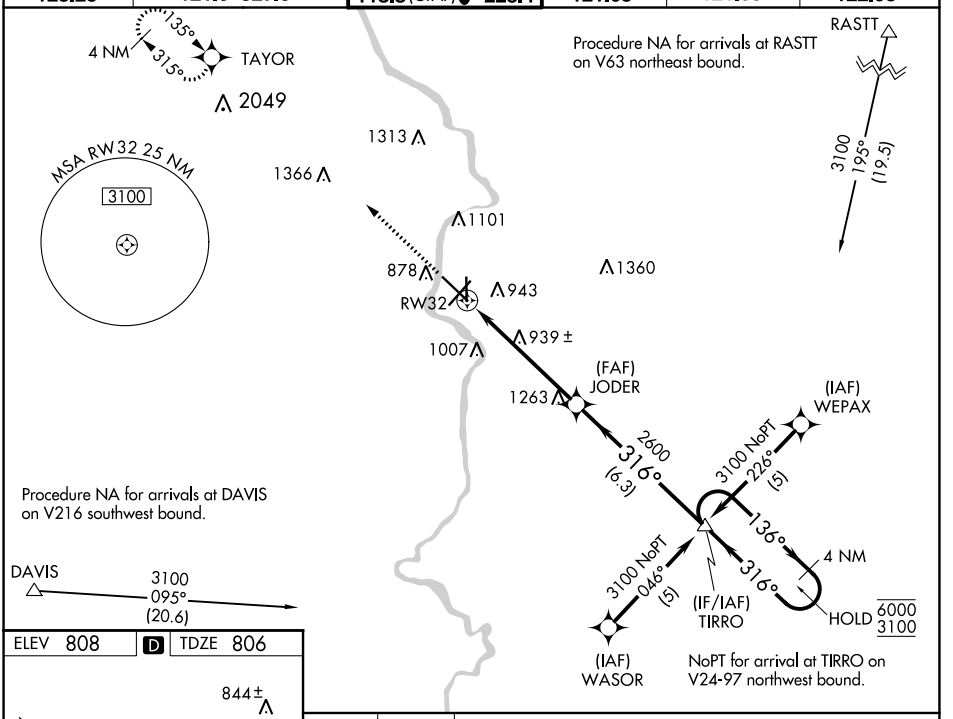

ELEV 808 | D | TDZE 806

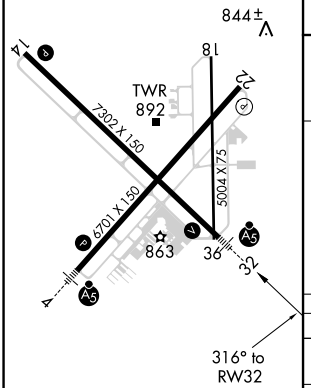

REIL Rwys 14 and 22 L
MIRL Rwy 18-36 L
HIRL Rwys 4-22 and 14-32 L

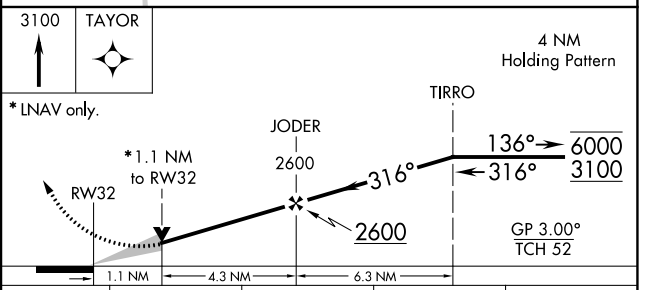

CATEGORY	A	B	C	D
LNAV/VNAV DA	1220-1 414 (500-1)			
LNAV MDA	1200-¾ 394 (400-¾)			1200-1 394 (400-1)
CIRCLING	1260-1 452 (500-1)		1280-1½ 472 (500-1½)	1420-2 612 (700-2)

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021