RNAV (GPS) RWY 7

GAINESVILLE RGNL (GNV)

APP CRS	Rwy Idg	4158
065°	TDZE	151
	Apt Elev	151

▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▲ VDP NA when using Ocala Intl-Jim Taylor Fld altimeter setting. When local altimeter setting not received, use Ocala Intl-Jim Taylor Field altimeter setting and increase all MDA 100 feet. Increase LNAV Cat C and Cat D, and Circling Cat D visibility ¼ mile. When VGSI inoperative, Circling Rwy 25 NA at night.

MISSED APPROACH: Climb to 2000 direct IMCEF and hold.

ATIS	JACKSONVILLE APP CON	GAINESVILLE TOWER★	GND CON	UNICOM
127.15	118.175 338.25	119.55 (CTAF) Ⓛ 353.7	121.7	122.95

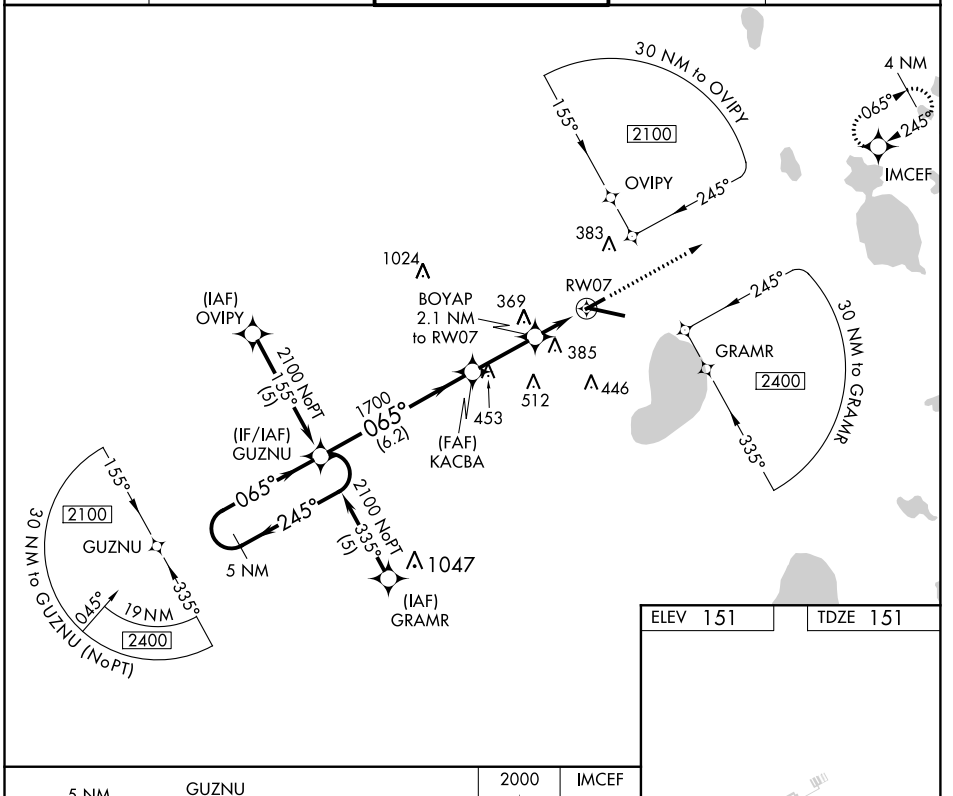

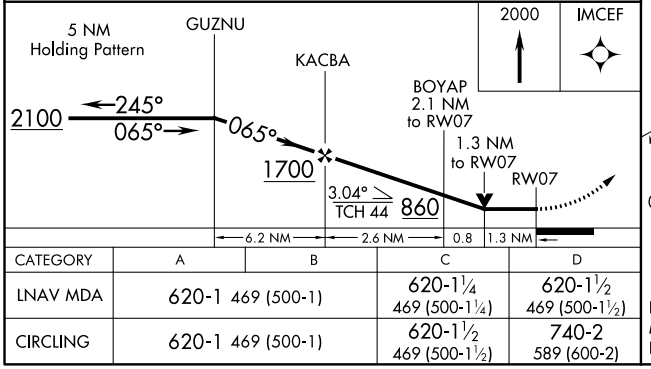

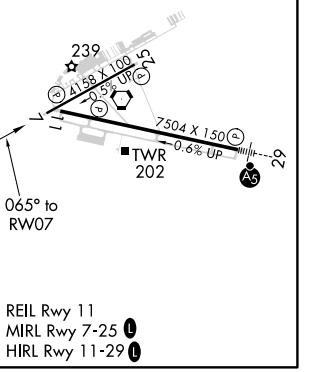

CATEGORY	A	B	C	D
LNAV MDA	620-1 469 (500-1)		620-1¼ 469 (500-1¼)	620-1½ 469 (500-1½)
CIRCLING	620-1 469 (500-1)		620-1½ 469 (500-1½)	740-2 589 (600-2)

REIL Rwy 11
MIRL Rwy 7-25 Ⓛ
HIRL Rwy 11-29 Ⓛ

SE-3, 25 FEB 2021 to 25 MAR 2021
SE-3, 25 FEB 2021 to 25 MAR 2021