RNAV (GPS) RWY 35

BRIGHAM CITY RGNL (BMC)

WAAS	APP CRS	Rwy Idg	8900
CH 50426	358°	TDZE	4230
W35A		Apt Elev	4230

When local altimeter setting not received, use Ogden altimeter setting and increase all MDA 100 feet, increase LP Cat C visibility ¼ mile, increase LNAV Cat B visibility ¼ mile, and Cat C visibility ⅝ mile, increase Circling Cat B visibility ¼ mile, and Cat C visibility ½ mile. DME/DME RNP-0.3 NA. VDP NA with Ogden altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA.

NA

MISSED APPROACH: Climbing left turn to 7100 direct KONNE and hold.

AWOS-3	SALT LAKE CITY APP CON	CLNC DEL	UNICOM
135.075	121.1 319.25	126.0	123.05 (CTAF) L

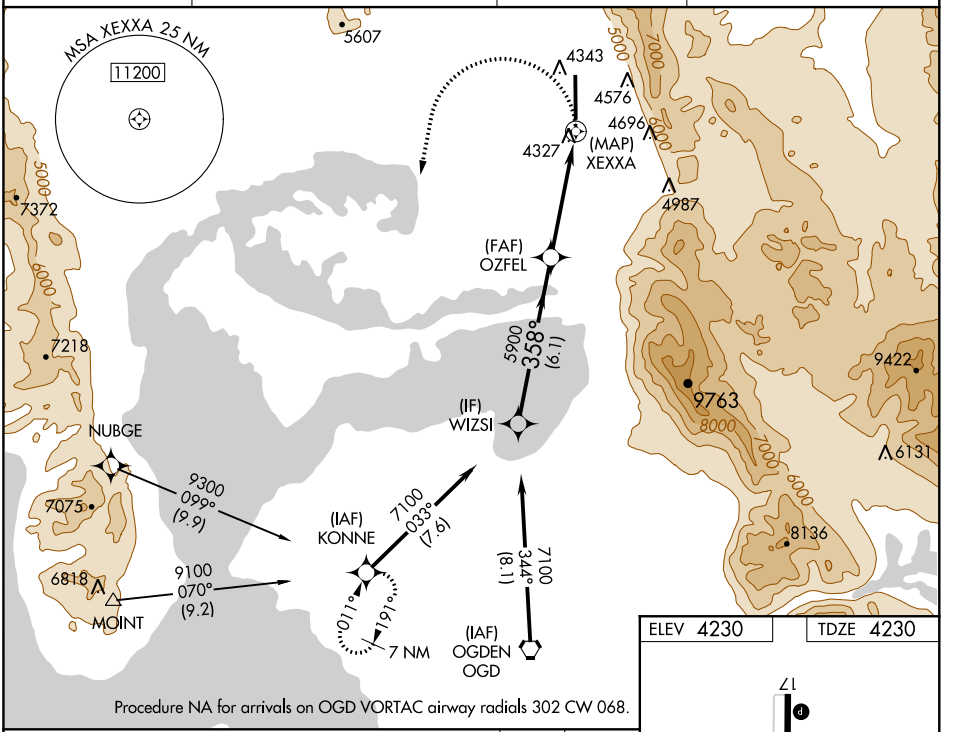

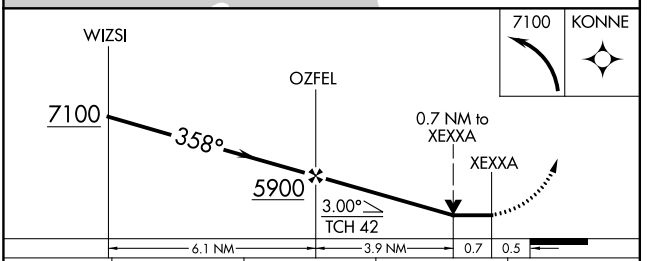

CATEGORY	A	B	C	D
LP MDA	4660-1	430 (500-1)	4660-1¼ 430 (500-1¼)	NA
LNAV MDA	4900-1	670 (700-1)	4900-1⅞ 670 (700-1⅞)	NA
CIRCLING	4900-1	670 (700-1)	5020-2¼ 790 (800-2¼)	NA

ELEV 4230 TDZE 4230

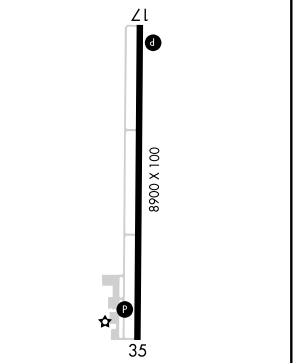

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

SW-4, 25 MAR 2021 to 22 APR 2021
SW-4, 25 MAR 2021 to 22 APR 2021