

LOC/DME I-RVT 111.15 Chan 48(Y)	APP CRS 002°	Rwy Idg 8003 TDZE 261 Apt Elev 264
---	------------------------	---



ILS or LOC RWY 36

GOLDEN TRIANGLE RGNL (GTR)


▲ DME or RADAR Required. VDP NA when using Columbus AFB altimeter setting. When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 39 feet and all MDA 40 feet; increase Circling Cats C/D ¼ mile, increase JAKVU Fix Minimums S-LOC 36 Cats C/D/E visibility ½ mile and Circling Cats C/D/E visibility ¼ mile.

MISSED APPROACH: Climb to 700 then climbing left turn to 2400 on IGB VORTAC R-266 to HANOP INT/IGB 13 DME and hold.

ATIS 126.375	COLUMBUS APP CON* 135.6 323.275	GOLDEN TRIANGLE TOWER* 118.2 (CTAF) 0 298.875	GND CON 135.375 322.475	CLNC DEL 135.375 322.475
------------------------	---	---	-----------------------------------	------------------------------------

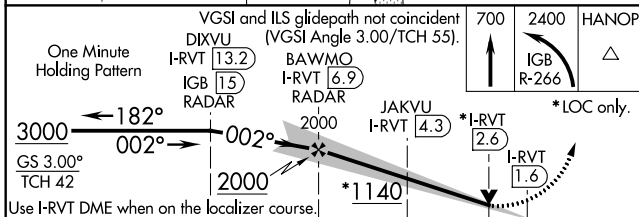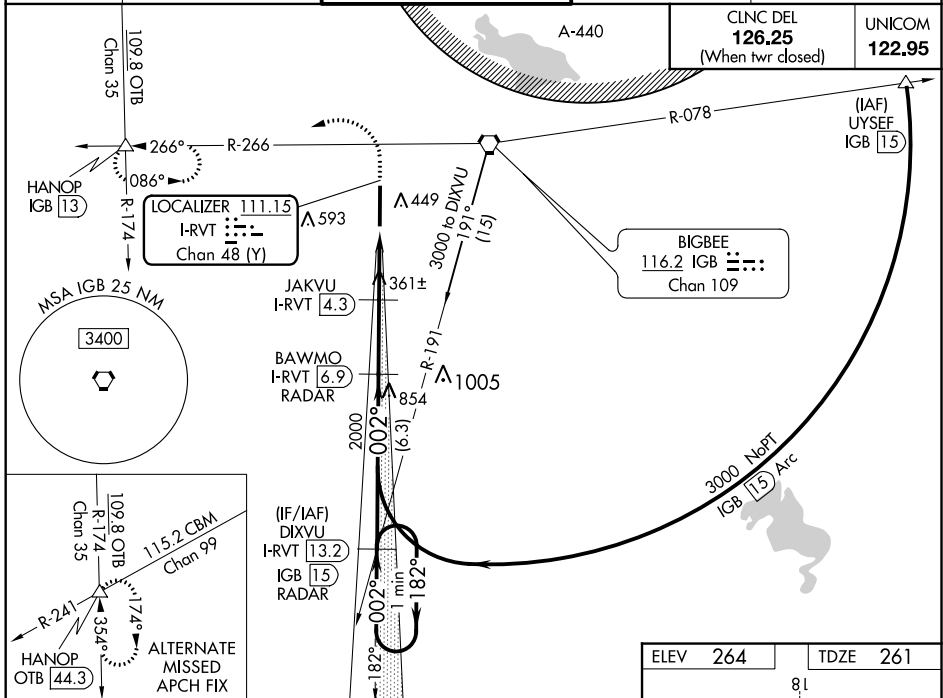

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 55).	700	2400	HANOP	
One Minute Holding Pattern	I-RVT 13.2	BAWMO I-RVT 6.9	IGB R-266	
	IGB 15	RADAR	△	
	RADAR	JAKVU I-RVT 4.3	*LOC only.	
		*I-RVT 2.6		
		I-RVT 1.6		
Use I-RVT DME when on the localizer course.				
CATEGORY	A	C	D	E
S-ILS 36		461-¾	200 (200-¾)	
S-LOC 36	1140-1¼	879 (900-1¼)	1140-2½	879 (900-2½)
C CIRCLING	1140-1¼	876 (900-1¼)	1140-2½	876 (900-2½)
		876 (900-2½)	876 (900-2¾)	876 (900-3)
JAKVU FIX MINIMUMS				
S-LOC 36	620-1	359 (400-1)		
C CIRCLING	760-1	496 (500-1)	960-2	960-2¼
		696 (700-2)	696 (700-2¼)	696 (700-2½)

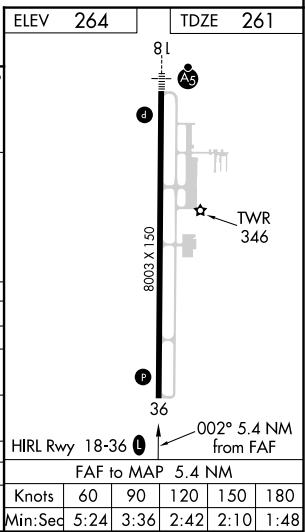

SC-4, 25 MAR 2021 to 22 APR 2021

SC-4, 25 MAR 2021 to 22 APR 2021