

NDB RWY 35L

CITY OF COLORADO SPRINGS MUNI (COS)


| | | | |
|----------------------|------------------------|-----------------------------|--|
| LOM CO 407 | APP CRS 352° | Rwy Idg TDZE Apt Elev | 11022 6075 6187 |
|----------------------|------------------------|-----------------------------|--|

▼ RADAR monitoring required when R-2601 in use.
▲ For inop MALS, increase S-35L Cats C and D visibility to 1 3/8 mile.





MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 051° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

| | | | | |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS 125.0 254.3 | SPRINGS APP CON 124.0 257,875 | SPRINGS TOWER 119.9 360.6 | GND CON 121.7 348.6 | CLNC DEL 134.45 363,125 |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|

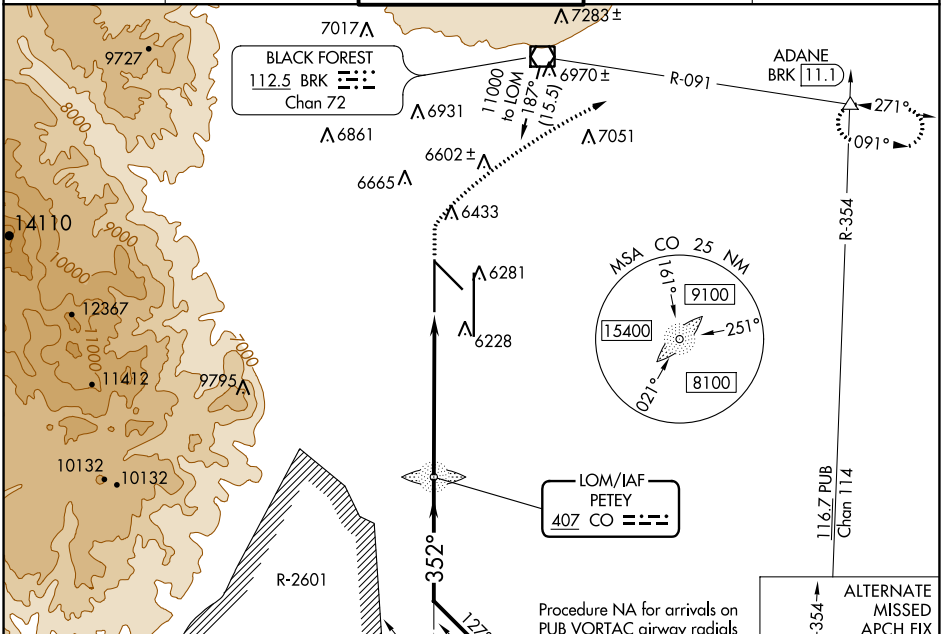

ELEV 6187 **D** TDZE 6075

HIRL Rwy 17R-35L and 17L-35R
 REIL Rwy 13, 17R, 31 and 35R
 TDZ/CL Rwy 17L and 35R
 MIRL Rwy 13-31

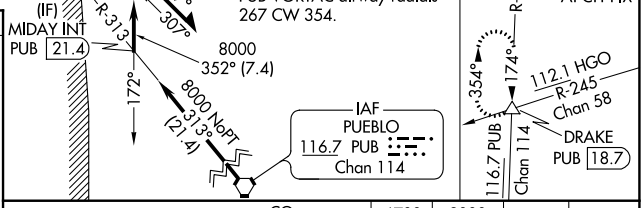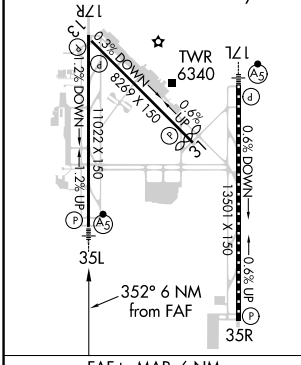

Cross-section diagram of the approach path showing altitudes (8000, 10800, 6700, 9000) and headings (172°, 352°, 051°). Includes a note 'Remain within 10 NM' and 'CO LOM 10800'.

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------|
| S-35L | 6540/40 | 465 (400-3/4) | 6540/50 | 465 (400-1) |
| C CIRCLING | 6740-1 553 (600-1) | 6800-1 613 (700-1) | 7040-2 1/2 853 (900-2 1/2) | 7260-3 1073 (1100-3) |

SW-1, 22 APR 2021 to 20 MAY 2021

SW-1, 22 APR 2021 to 20 MAY 2021