

ILS or LOC RWY 4R

NEWARK LIBERTY INTL (EWR)


LOC/DME I-EZA	APP CRS	Rwy Idg	4R 8810	4L 8460
108.7	039°	TDZE	11	10
Chan 24		Apt Elev	17	17

▼ Inoperative table does not apply to sidestep 4L Cats A and B.
▲ For inoperative MALSRS, increase sidestep 4L Cat C visibility to 1 3/4 mile. When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.





MISSED APPROACH: Climb to 600 then climbing right turn to 2500 on heading 060° and TEB VOR/DME R-205 to TEB VOR/DME and hold.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

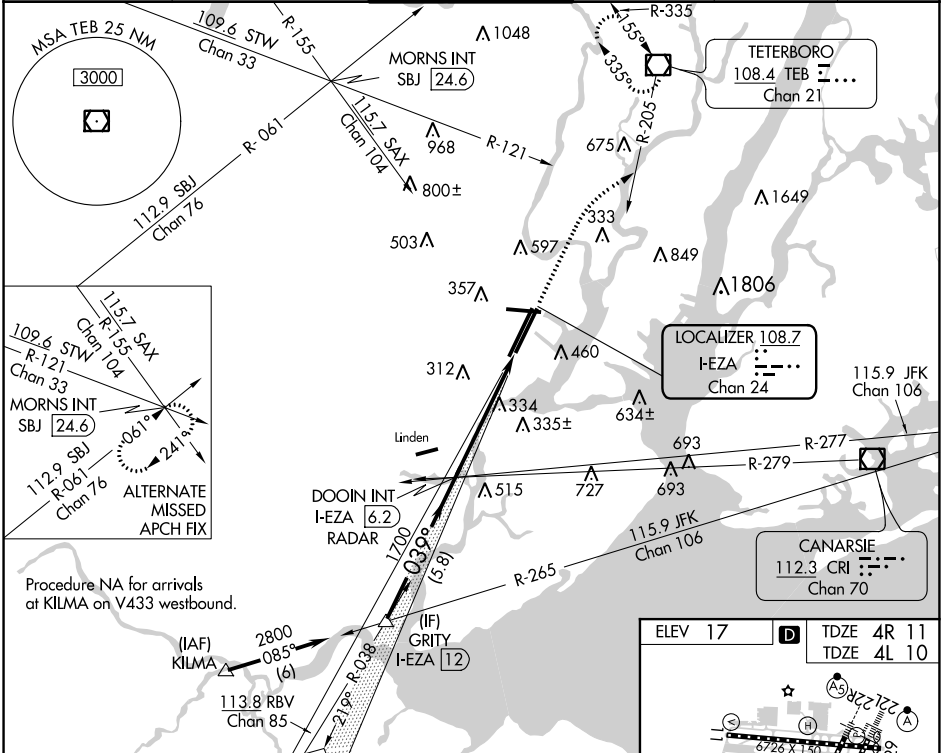

NE-2, 22 APR 2021 to 20 MAY 2021

NE-2, 22 APR 2021 to 20 MAY 2021

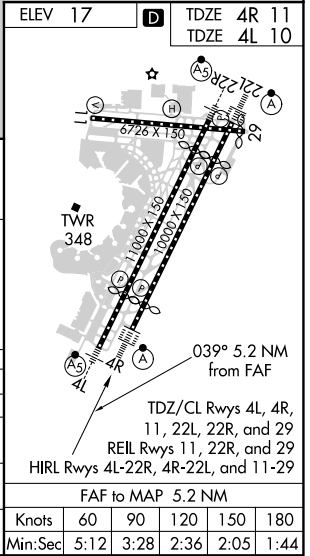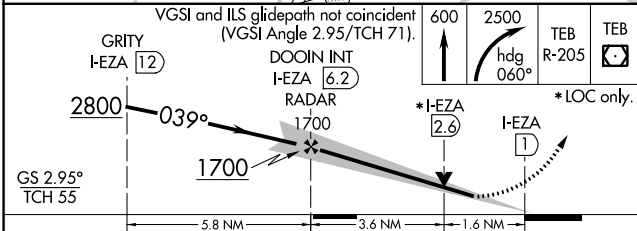

CATEGORY	A	B	C	D
S-ILS 4R	211/18 200 (200-1/2)			
S-LOC 4R	600/24	589 (600-1/2)	600/60	589 (600-1 1/4)
SIDESTEP RWY 4L	620/50	610 (700-1)	620-1 3/8	620-1 1/2
			610 (700-1 3/8)	610 (700-1 1/2)
C CIRCLING	760-1	820-1	900-2 3/4	900-3
	743 (800-1)	803 (900-1)	883 (900-2 3/4)	883 (900-3)