
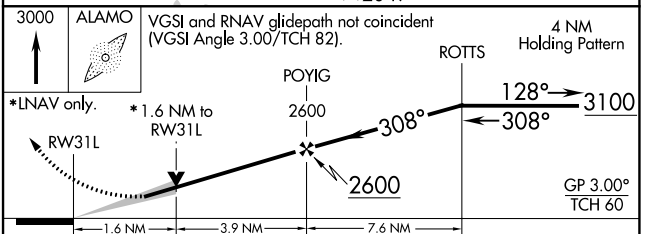
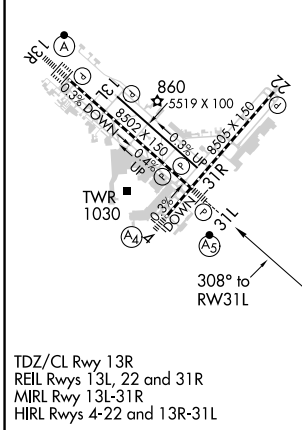


WAAS CH 61209 W31A	APP CRS 308°	Rwy Idg TDZE 790 Apt Elev 809	8502
----------------------------------------	------------------------	---------------------------------------------------	-------------

RNAV (GPS) Y RWY 31L

SAN ANTONIO INTL (SAT)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Circling NA west of Rwy 4 and 13R. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to 1½ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cats C and D visibility to 1½ SM.</p>			<p>MALSR</p>	<p>MISSED APPROACH: Climb to 3000 direct ALAMO LOM and hold.</p>	
D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6	CLNC DEL 126.7	CPDLC

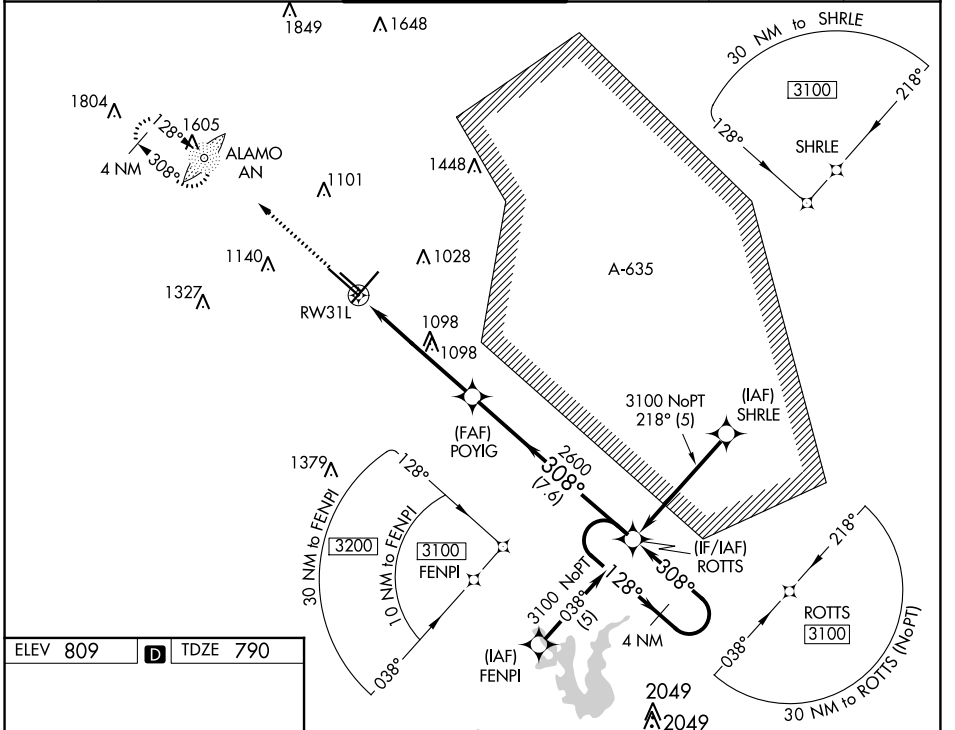

CATEGORY	A	B	C	D
LPV DA		1207/50	417 (400-1)	
LNAV/VNAV DA		1246/60	456 (500-1¼)	
LNAV MDA	1360/24	570 (600-½)	1360-1¼	570 (600-1¼)
CIRCLING	1360-1	551 (600-1)	1360-1¾ 551 (600-1¾)	1380-2 571 (600-2)

SC-3, 22 APR 2021 to 20 MAY 2021

SC-3, 22 APR 2021 to 20 MAY 2021