

WAAS CH 58016 W31A	APP CRS 308°	Rwy Idg TDZE Apt Elev	5001 1885 1915
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 31

POCONO MOUNTAINS MUNI (MPO)


⚠ Baro-VNAV NA when using Wilkes-Barre/Scranton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Rwy 31 helicopter visibility reduction below 3/4 SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wilkes-Barre/Scranton altimeter setting; increase LPV DA to 2403 feet and visibility 1/4 SM, LNAV/VNAV DA to 2446 feet and visibility 3/8 SM; increase all MDAs 180 feet and visibility LNAV Cat C/D 3/8 SM and Circling Cat C/D 1/2 SM. Circling Rwy 23 NA at night.

MISSED APPROACH: Climb to 4200 direct RYANF and on track 228° to WHITT and hold.


ASOS 120.275	WILKES-BARRE APP CON 126.3 256.7	CLNC DEL 125.3	UNICOM 122.7 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

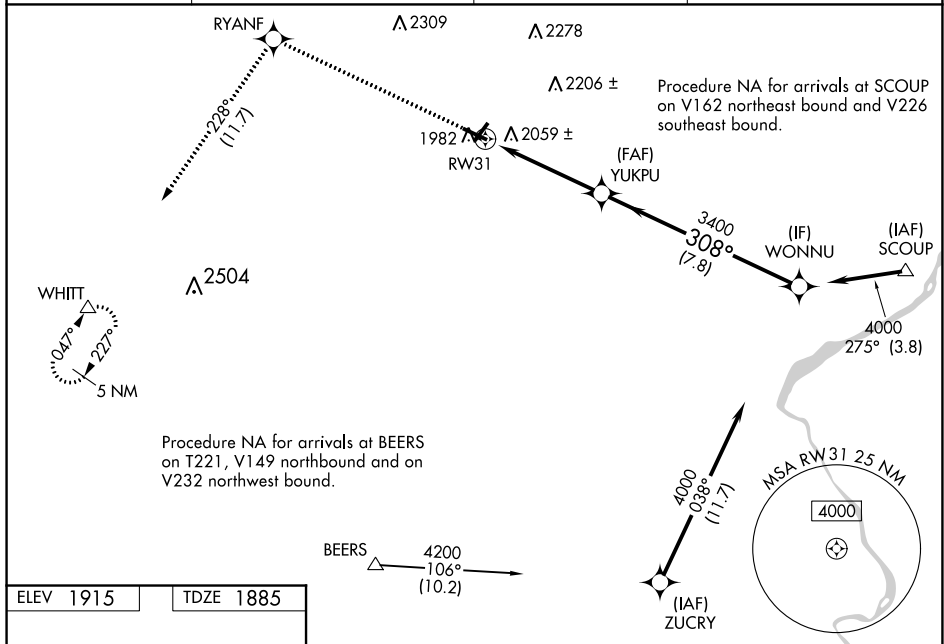

ELEV 1915	TDZE 1885
-----------	-----------

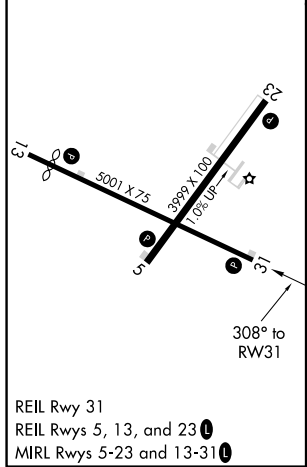

4200	RYANF	tr 228°	WHITT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 40).
------	-------	---------	-------	--

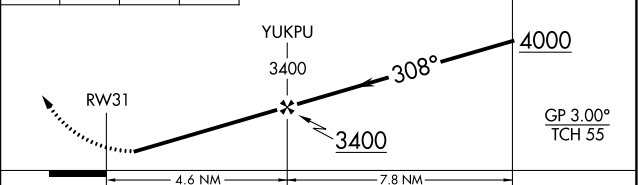

CATEGORY	A	B	C	D
LPV DA		2224-1 1/8	339 (400-1 1/8)	
LNAV/VNAV DA		2267-1 1/4	382 (400-1 1/4)	
LNAV MDA	2320-1	435 (500-1)	2320-1 3/8	435 (500-1 3/8)
C CIRCLING	2420-1 505 (600-1)	2500-1 585 (600-1)	2600-2 685 (700-2)	2660-2 1/2 745 (800-2 1/2)

NE-4, 22 APR 2021 to 20 MAY 2021

NE-4, 22 APR 2021 to 20 MAY 2021