


LOM SH 375	APP CRS 047°	Rwy Idg TDZE Apt Elev	6002 1184 1201
----------------------	------------------------	-----------------------------	---

AL-5369 (FAA)


NDB RWY 5

SHENANDOAH VALLEY RGNL (SHD)

⚠ When local altimeter setting not received, use Charlottesville altimeter setting and increase all MDAs 140 feet and visibility S-5 and Circling Cat C ½ SM, Cat D ¼ SM.



MALSR  MISSED APPROACH: Climb to 2400 then climbing left turn to 3600 direct SH LOM and hold.

AWOS-3 124.925	POTOMAC APP CON 132.85 323.125	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------	---------------------------------

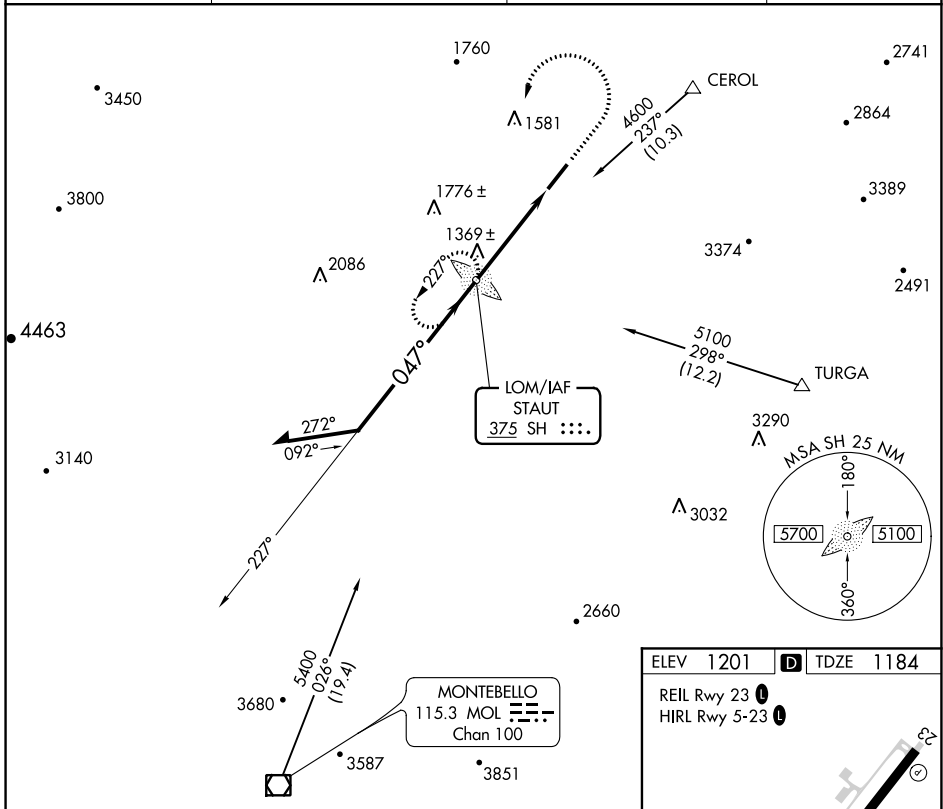

NE-3, 22 APR 2021 to 20 MAY 2021

NE-3, 22 APR 2021 to 20 MAY 2021

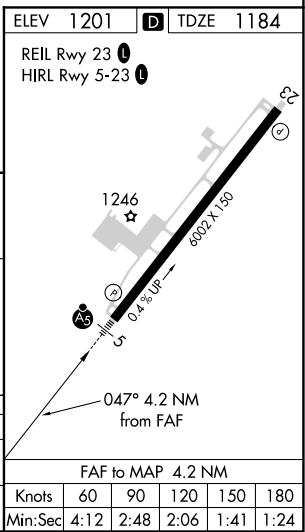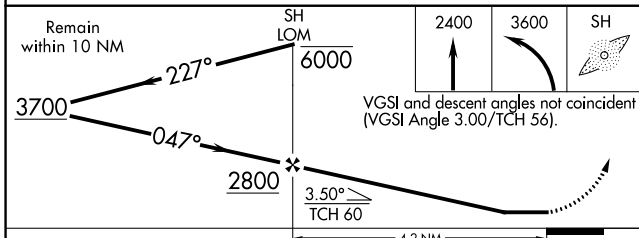

CATEGORY	A	B	C	D
S-5	1760-¾ 576 (600-¾)	1760-1 576 (600-1)	1760-1½ 576 (600-1½)	1760-2 576 (600-2)
CIRCLING	1760-1 559 (600-1)	1900-2 699 (700-2)	2060-2¾ 859 (900-2¾)	