

MACDILL AFB (MCF)(KMCF) AF (A) 4 S UTC-5(-4DT) N27°50.96' W82°31.27'

14 B LRA NOTAM FILE MCF Not insp.

MIAMI

H-8H, L-21D, 24F

DIAP, AD

RWY 05-23: H11421X151 (ASPH-GRVD) PCN 71 R/B/W/T HIRL

RWY 05: ALSF1. PAPI(P4L)—GA 3.0° TCH 56'. RVR-T

RWY 23: ALSF1. PAPI(P4L)—GA 3.0° TCH 56'. RVR-T

ARRESTING GEAR/SYSTEM

RWY 05 HOOK BAK-12(B) (1338 FT); UNAVBL DURG WKND & FED HOL; AVBL MON-FRI 1300Z-2030Z++; 45 MIN PPR TO CONNECT CABLE.

HOOK BAK-12(B) (1397 FT); UNAVBL DURG WKND & FED HOL; AVBL MON-FRI 1300Z-2030Z++; 45 MIN PPR TO CONNECT CABLE. **RWY 23**

SERVICE: FUEL 115, JET A, A+++ OX2 **MILITARY—LGT** Rwy 05-23 PAPI set for hgt group 3. **A-GEAR** S BAK-12B O/S UFN. **JASU** (A/M32A-86) (AM32-95) (M32A-60) **FUEL** A+++ . Air Card rqrd for avn fuel or U.S. cash; cash fuel PPR—fuels DSN 968-2074. **FLUID** LPOX LOX **TRAN ALERT** Opr 1100-0300Z. Lavatory svc only, PPR. Ltd tran prk for tactical acft; exp svc delay for tactical acft. Unable to svc acft with ordnance. Tran Alert is contract maint. Tran acft must land by 0230Z± exc VIP. All ftr type/trainer acft must land by 0200Z±. No multiple IFR/VFR apch for tran acft after 0230Z±. Tran Alert can support minimal tran acft for lcl or out and back tran flts with prior apvl. All series B-747 and A-380 must arrive with a tow bar.

MILITARY REMARKS: Attended continuously. See FLIP AP/1 Fit Haz (Florida—R2901) and Supplementary Arpt Rmk and afterburner proc. Rwy 05-23 mkd 150 ft wide with 50 ft wt brg shoulders each side. First 1000 ft conc mid 9420 ft asph. **RSTD** Avoid ovft of the St. Petersburg land mass by at least 1.5 NM. PPR—Base Ops DSN 968-2929/2350, C813-828-2350/2929, for PPR nr, for svc and other rstd. PPR issued up to 7 days prior to arr. All acft must land by PPR approved time or call with deviations or PPR is invalid; exc for VIP. Afltd mgmt must rqd FPL for acft prior to dep. All DV acft and tntst acft ctc MacDill Cmd Post 311.0 or DSN 968-4361/4362 (C813-828-4361) 3 hr prior to arr and 30 min prior to arr with DV codes, customs info and Space-A pax info. All aircrew dep civ arpt or guard/reserve base call Comd Post 1 hr prior to takeoff with pax/cargo/eta info. PPR number good for req day only. S ramp (B ramp), electrical box 116' and fence 138' from twy cntrln. Acft opr rstd dur Bird Watch Cond Moderate (tkf or ldg permission only when departure and arr rte avoid identification bird act. No lcl IFR/VFR tfc pat act) and Severe (tkf and ldg prohibited without OG/CC apvl), etc ATIS, Twr, Comd Post, or AMOPS for current Bird Watch Cond. All acft dep MacDill AFB, with exc to no DOD affiliated acft, must leave copy of FPL with Afltd Mgmt. Bravo Ramp parking spot B4 clsd for all acft. Cargo/hvy acft lndg on BAK-12 cables na. **CAUTION** Bird haz; exp hvy bird act fm Nov 1-Feb 28 durg Phase II BASH period; 24 hr bird watch alert in effect. Numerous voids/sinkholes on afltd; remain on twy cntrln. See FLIP AP/1 Supplementary Arpt Remarks for bird haz info. On inst apch to Rwy 23, use caution dur ovft of Peter O. Knight Arpt due to lgt acft tfc blw apch leg 4 NM NE. Commercial acft cross apch to MacDill AFB enroute to Tampa Intl Arpt at and abv 2100 ft. On inst apch to Rwy 05 use caution dur ovft of Albert Whitted Arpt due to lgt tfc blw apch leg 6 NM SW. Maint rwy and twy cntrln when exiting rwy. Acft making 180° turns on rwy use hammerheads last 1000 ft at each end. Taxilane H, fence 107' from twy cntrln, all acft larger than KC-135 need wing walkers and tran alert follow me vehicle. S ramp (Bravo ramp) electrical box 116' from twy cntrln and fence 138' from twy cntrln, all acft larger than KC-135 need wing walkers and tran alert follow me vehicle. DV-4 spot is for C12, C21 acft tight turn radius. Unctd VFR tfc in vcntry of KMCF blw 1200'. NSTD ovrn mrk MacDill AFB on Rwy 05-23 ends. NSTD mrks north/south ramps, wing-tip obst lines for trng. NSTD acft turning RAD on tran spots 16-25, follow tran alert vehicle. Birdbath only used for P-3, C-130, E-3A, KC-135 & B-737 acft no ftr or copter unless apvd by afm. **TFC PAT** Rectangular 1100 ft; ovhd 1600 ft. Drg VFR cond tkof and TGL mnntn 1100 ft til DER. **CSTMS/AG/IMG** CSTMS/AG/IMG See FLIP AP/1. **MISC** MacDill crash fire response (CFR) is an acft rescue and firefighting (ARFF) CAT 4 with 7,800 gal capability steady. ARFF cond for MacDill AFB is optimum level of svc (OLS) for CAT 1-4, and reduced level of svc (RLS) for CAT 5-6. ATC/Wx will not incld/relay wind correction into fcst/phraseology, therefore, aircrews will incorporate a +/- . Wx fit ops 24 hrs. Excld hol or dur severe wx. Wx fit DSN 968-4405/2854/2035, C813-828-4405/2854/2035. During afltd closures ctc 26 OWS, DSN 331-2651, C318-529-2651. When possible, provide 2 hr adv ntc for all rprd briefings. When NVD ops are in efct ctc twr 10 min prior to arr or dep for afltd lgt adj—info DSN 968-2120/4822. NOTE: See Special Notices—Airspace delegated to MACDILL AFB.

COMMUNICATIONS: SFA ATIS 133.825 270.1 PTD 372.2

Ⓡ TAMPA APP CON 124.95 354.0

TOWER 120.175 294.7 GND CON 118.575 275.8

Ⓡ TAMPA DEP CON 119.9 290.3 353.575 (Rwy 05) 119.65 353.575 (Rwy 23)

Ⓢ AMW COMD POST (LIGHTNING OPS) 311.0 323.8 PMSV METRO 225.05

AG See Global HF Sys listing in Flight Information Handbook.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc continuous.

RADIO AIDS TO NAVIGATION: NOTAM FILE MCF.

(L) **TACAN** Chan 47 MCF (111.0) N27°51.67' W82°30.81' at fld. 12/6W.

mp 0900-2300Z† Fri

TACAN AZIMUTH unusable:

230°-240° byd 30.0 NM

240°-245° byd 30 NM

246°-341° byd 35 NM

342°-345°

346°-011° byd 35 NM

DME unusable:

230°-240° byd 30 NM

241°-284° byd 35 NM

296°-345° byd 35 NM

342°-345° byd 32 NM

346°-011° byd 35 NM

ILS 109.5 I-MCF Rwy 05. Class IC. ILS - 05: Rwy 05 course line is offset 2.9° to SE Rwy hdg is 046 deg. Rwy 23 course line is offset 2.7° to NE, Rwy hdg is 226 deg. Mp 0900-1200Z† Tue-Wed.

ILS 111.7 I-GBZ Rwy 23. Class IB. Rwy 23 course line is offset 2.7° to NE, Rwy hdg is 226 deg. Mp 1200-1500Z† Tue-Wed.

COMM/NAV/WEATHER REMARKS: MacDill surveillance radar provided by Tampa. Tsnt aircrews may ctc 9 OWS for WX BRIEF—DSN 965-0939.

MARATHON

THE FLORIDA KEYS MARATHON INTL (MTH)(KMTH) 3 E UTC-5(-4DT) N24°43.57' W81°03.08'

MIAMI

5 B LRA ARFF Index—See Remarks NOTAM FILE MTH

H-81, L-23C

RWY 07-25: H5008X100 (ASP-GRVD) S-75, D-129, 2D-191

IAP

PCN 94 F/A/W/T MIRL

RWY 07: REIL. PAPI(P4L)—GA 3.0° TCH 24'. Tree.

RWY 25: PAPI(P4L)—GA 3.0° TCH 24'. Antenna.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-5008 TODA-5008 ASDA-5008 LDA-5008


RWY 25: TORA-5008 TODA-5008 ASDA-5008 LDA-5008

SERVICE: S2 FUEL 100LL, JET A1+ OX1, 2, 3, 4 LGTACTIVATE REIL

Rwy 07; PAPI Rwy 07 and Rwy 25; MIRL Rwy 07-25—CTAF.

NOISE: Noise sens area; use NBAA noise abatement proc; Icl ordinance rqr eng runup in dsngd area on coml or FBO ramp fm 0400-1200Z† and fines.

AIRPORT REMARKS: Attended 1300-2300Z†. Birds on and invof arpt. Aft hr Jet-A fuel—305-481-7615. Self svc fuel H24. Class I, ARFF Index A. 48 hr PPR for unskd Part 121 ops with gtr than 30 pax seats. 24 hr PPR for acft with wingspan 95 ft or gtr. Rwy 07-25 has 200 ft nonstandard seprn dist fm twy to rwy cntrin—amgr or 305-743-1995. Twy A clsd to acft with wingspan 79 ft or gtr when acft with wingspan of 95 ft or gtr ldg or tkof Rwy 07-25. Arpt ops notification will be tmtd on CTAF. CBP user fee fac Wed-Sun 1400-2130Z†. Clsd to arr Mon and Tues exc CBP apreq—305-289-2029. See Special Notices—U.S. special customs requirement. Flight Notification Service (ADCUS) avbl.

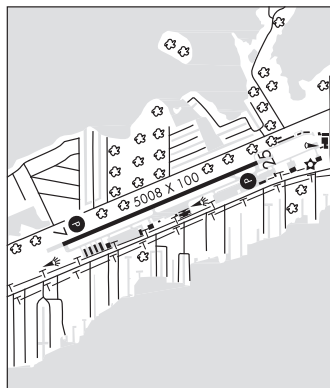

AIRPORT MANAGER: 305-289-6302

WEATHER DATA SOURCES: ASOS 135.525 (305) 743-8373.

COMMUNICATIONS: CTAF/UNICOM 122.975

MARATHON RCO 122.6 (MIAMI RADIO)

MIAMI CENTER APP/DEP CON 133.5

CLEARANCE DELIVERY PHONE: For CD if una to ctc on FSS freq, ctc Miami ARTCC at 305-716-1731.

RADIO AIDS TO NAVIGATION: NOTAM FILE EYW.

KEY WEST (H) VORTAC 113.5 EYW Chan 82 N24°35.15' W81°48.03' 077° 41.8 NM to fld. 10/1E.

VOR unusable:

025°-059° blo 3,000'

060°-093° byd 20 NM blo 5,000'

085°-095° byd 12 NM blo 1,600'

094°-140° byd 20 NM

270°-280° byd 20 NM

337°-352° byd 20 NM

190°-255°

TACAN unusable:

123°-133° byd 20 NM

MARATHON NDB (HW) 260 MTH N24°42.71' W81°05.72' 074° 2.5 NM to fld. 6/4W. NOTAM FILE MTH.