

| | | |
|--|------------------------|--|
| WAAS CH 72800 W17B | APP CRS 172° | Rwy Idg 11022 TDZE 6177 Apt Elev 6187 |
|--|------------------------|--|



RNAV (GPS) Y RWY 17R

CITY OF COLORADO SPRINGS MUNI (COS)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F); DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC
 ▲ RWY 17L and ILS RWY 17L (SA CAT I). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 7000 then climbing left turn to 9000 direct DRAKE and hold.

| | | | | |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS 125.0 254.3 | SPRINGS APP CON 124.0 257.875 | SPRINGS TOWER 119.9 360.6 | GND CON 121.7 348.6 | CLNC DEL 134.45 363.125 |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|

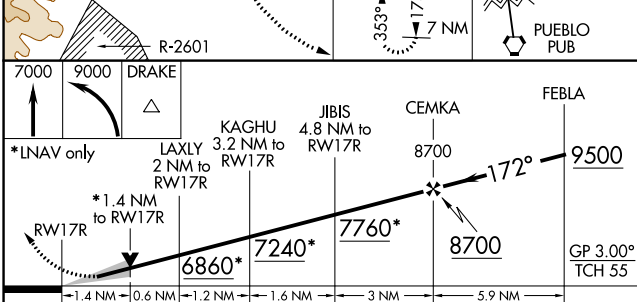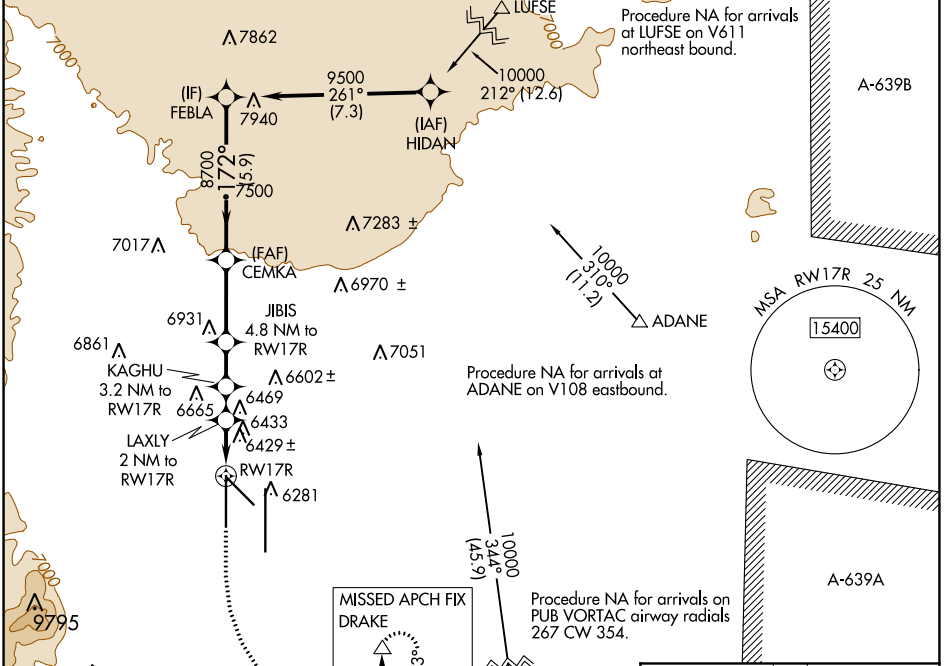

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA | 6377/40 | | 200 (200-¾) | |
| LNAV/VNAV DA | 6752-2 | | 575 (600-2) | |
| LNAV MDA | 6680/55 | 503 (500-1) | 6680-1⅓ | 503 (500-1⅓) |
| C CIRCLING | 6740-1 553 (600-1) | 6800-1 613 (700-1) | 7040-2½ 853 (900-2½) | 7260-3 1073 (1100-3) |

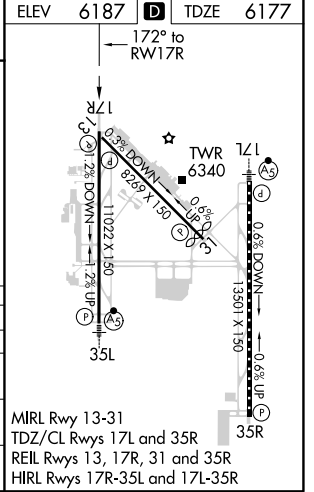

SW-1, 15 JUL 2021 to 12 AUG 2021

SW-1, 15 JUL 2021 to 12 AUG 2021