

WAAS CH 77937 W10D	APP CRS 090°	Rwy Idg TDZE Apt Elev	7500 680 680
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 10R

CHICAGO O'HARE INTL (ORD)

RNP APCH.


Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
 LNAV procedure NA during simultaneous operations.
 Use of FD or AP providing RNAV track guidance required during simultaneous operations.
 For inop ALS, increase RNAV/VNAV all Cats visibility to 1/2 SM.

ALSF-2

 MISSED APPROACH:
 Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)				GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675	(TWR CENTER) 121.75 (OBND) (IBND) 121.9
--	---	--	--	--	--	--	--

CLNC DEL 121.6	CPDLC
--------------------------	-------

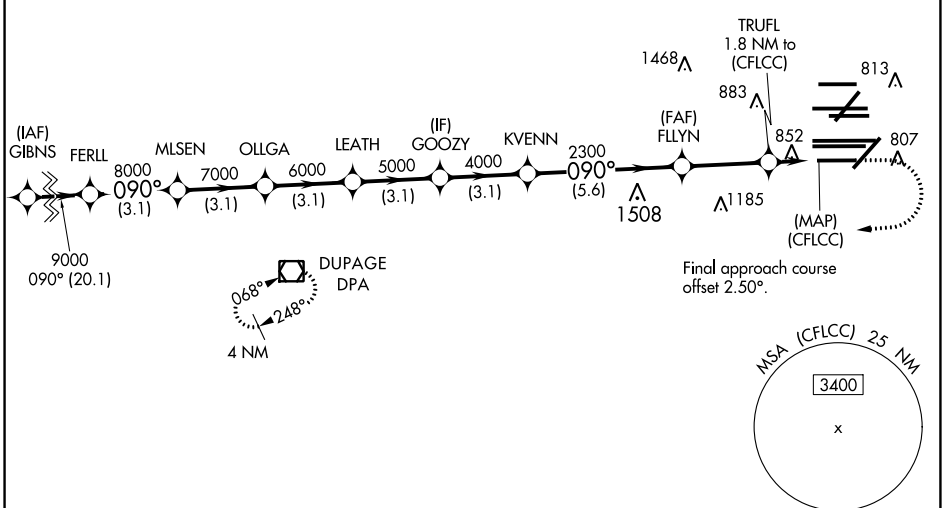

EC-3, 15 JUL 2021 to 12 AUG 2021

EC-3, 15 JUL 2021 to 12 AUG 2021

ELEV 680		D TDZE 680	
1200 4000 DPA		*LNAV only.	
GP 3.00	TCH 55	3.1 NM	3.1 NM
9000	8000	7000	6000
5000	4000	2300	*1300
0.6	1.2	(CFLCC)	
CATEGORY	A	B	C
LPV DA	930/24		250 (300-1/2)
LNAV/VNAV DA	1157/50		477 (500-1)
LNAV MDA	1120/24	440 (500-1/2)	1120/40 440 (500-3/4)

HIRL all Rwys
 TDZ/CL all Rwys except 4L