

|                           |                        |                             |                                       |
|---------------------------|------------------------|-----------------------------|---------------------------------------|
| LOC I-HFD<br><b>109.7</b> | APP CRS<br><b>002°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4006</b><br><b>17</b><br><b>18</b> |
|---------------------------|------------------------|-----------------------------|---------------------------------------|


# LDA RWY 2

HARTFORD-BRAINARD (HFD)

**▼** Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 11, 20, 29 NA. Night landing: Rwy 2 operational VGSI required, remain on or above VGSI glidepath until threshold.

**▲** MISSED APPROACH: Climbing right turn to 2500 on heading 090° and PUT VOR/DME R-265 to RAMBO INT and hold.

|                       |  |  |                         |                          |                         |
|-----------------------|--|--|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>126.45</b> | YANKEE APP CON<br><b>127.8 269.325</b> | <b>BRAINARD TOWER *<br/>119.6 (CTAF) 0 248.2</b> | GND CON<br><b>121.6</b> | CLNC DEL<br><b>121.6</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|--|-------------------------|--------------------------|-------------------------|

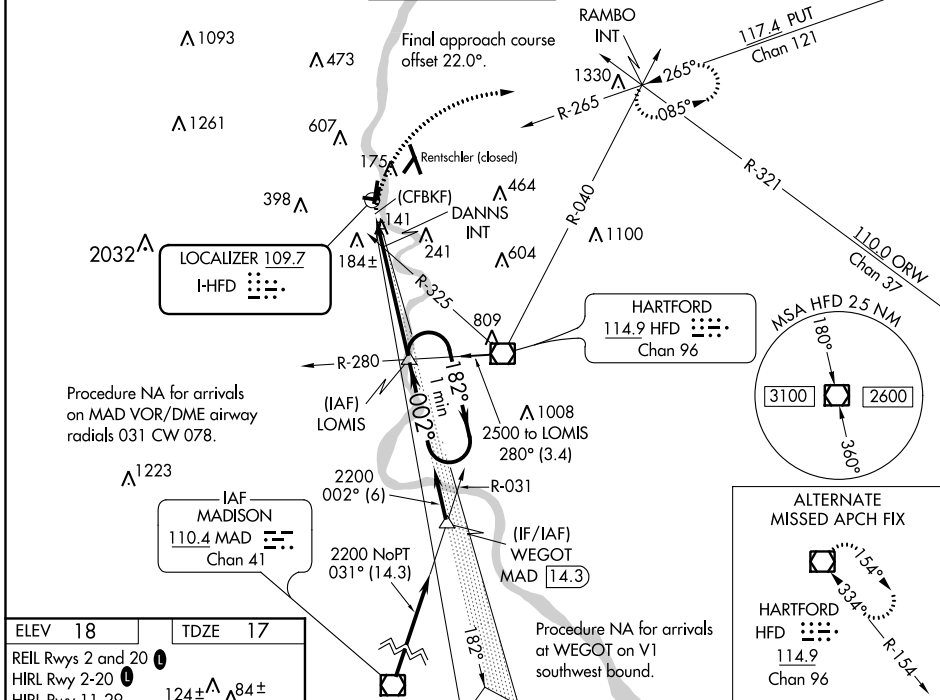

NE-1, 15 JUL 2021 to 12 AUG 2021

NE-1, 15 JUL 2021 to 12 AUG 2021

|                   |                |
|-------------------|----------------|
| ELEV 18           | TDZE 17        |
| REIL Rws 2 and 20 | HIRL Rwy 2-20  |
|                   | HIRL Rwy 11-29 |

124± A 84±

45

95± A

135± A

130± A

84±

45± A

2314 X 71

118 A

2

59± A


TWR 75

4417 X 150

2309 X 150

FAF to MAP 5.3 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:18 | 3:32 | 2:39 | 2:07 | 1:46 |

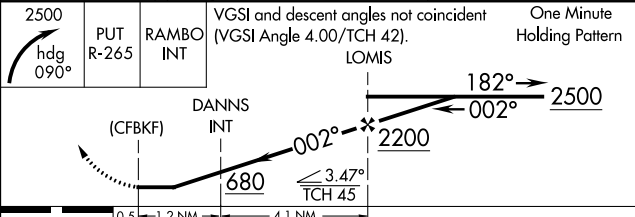

| CATEGORY   | A     | B           | C                            | D                     |
|--|-------|-------------|------------------------------|-----------------------|
| S-2  | 680-1 | 663 (700-1) | 680-1 7/8                    | 663 (700-1 7/8)       |
| CIRCLING   | 680-1 | 662 (700-1) | 900-2 3/4<br>882 (900-2 3/4) | 920-3<br>902 (1000-3) |
| DANNS FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) |       |             |                              |                       |
| S-2  | 460-1 | 443 (500-1) | 460-1 3/8                    | 443 (500-1 3/8)       |
| CIRCLING   | 580-1 | 562 (600-1) | 900-2 3/4<br>882 (900-2 3/4) | 920-3<br>902 (1000-3) |