RNAV (GPS) RWY 8L

MIAMI INTL (MIA)

WAAS	APP CRS		
CH **42703**	**092°**	Rwy Idg	**8600**
W08A		TDZE	**9**
		Apt Elev	**9**

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 9. Rwy 8L helicopter visibility reduction below ¾ SM NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR **119.15**	**124.85** **322.3**	**118.3** **256.9**	**121.8** (8L/8R/12/26L/26R) **348.6**	**135.35**	
DEP **133.675**			**127.5** (9/27/30)		

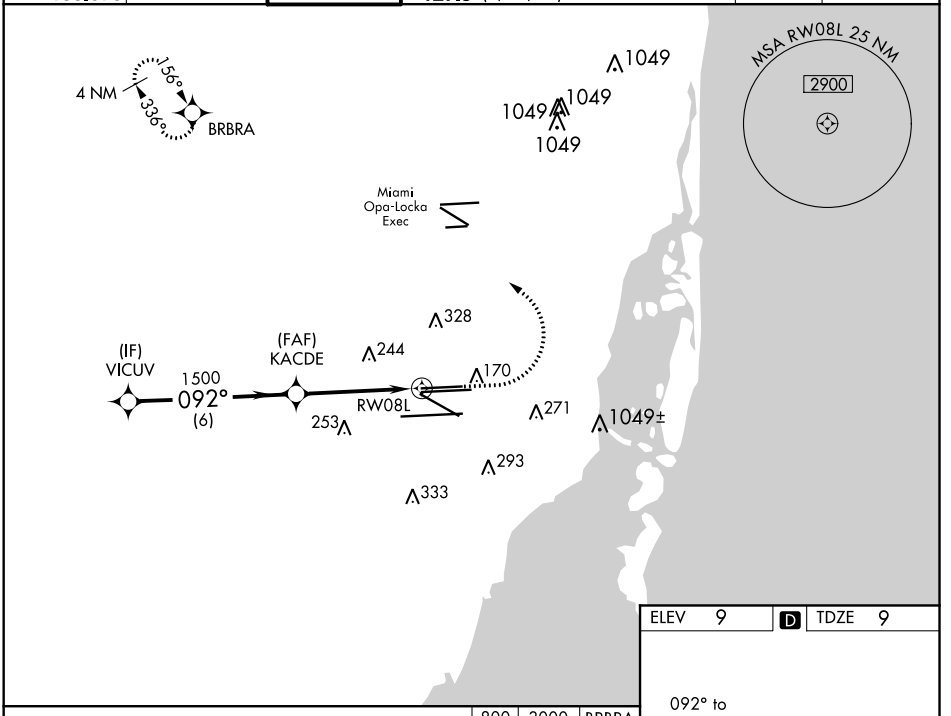

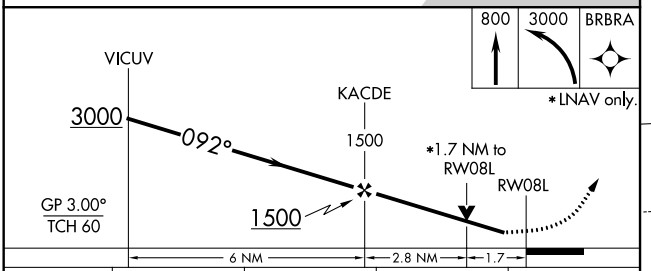

CATEGORY	A	B	C	D
LPV DA	279-1	270 (300-1)		
LNAV/VNAV DA	513-1⅝	504 (600-1⅝)		
LNAV MDA	600-1	591 (600-1)	600-1¾	591 (600-1¾)

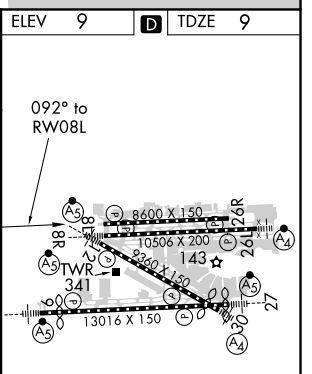

SE-3, 15 JUL 2021 to 12 AUG 2021
SE-3, 15 JUL 2021 to 12 AUG 2021