

WAAS CH 81905 W26B	APP CRS 272°	Rwy Idg 10220 TDZE 8 Apt Elev 9
--	------------------------	--

RNAV (GPS) Z RWY 26L


MIAMI INTL (MIA)

▼ Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C (43°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSF, increase LNAV/VNAV Cat D visibility to RVR 6000 and LNAV Cat D visibility to 1½ mile.




MISSED APPROACH: Climb to 2000 direct LAWNN and on track 345° to BRBRA and hold.

D-ATIS ARR 119.15 DEP 133.675	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)	348.6	CLNC DEL 135.35	CPDLC
---	--------------------------------------	-----------------------------------	--	--------------	---------------------------	-------

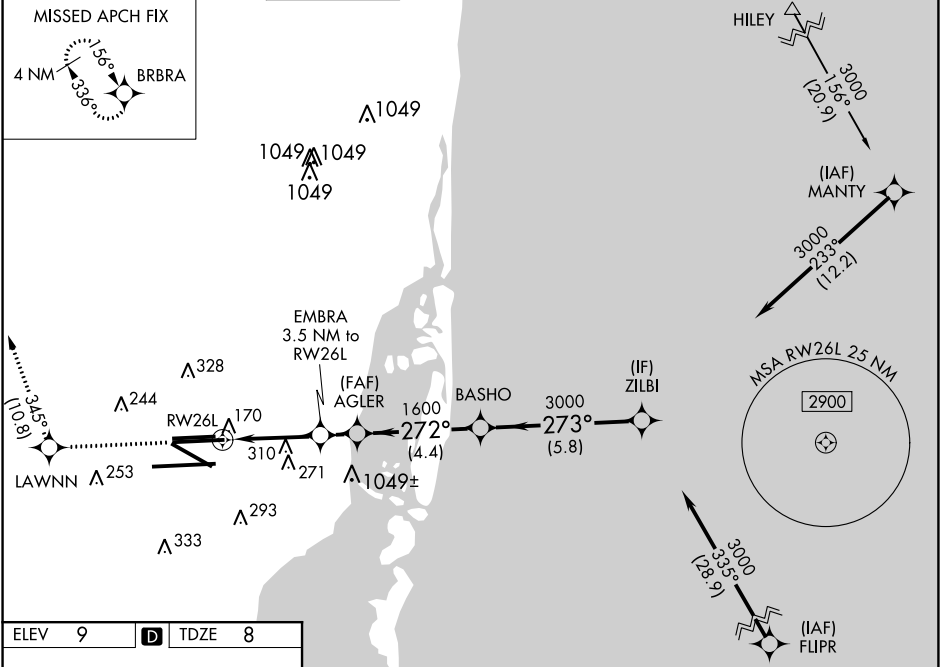

ELEV 9	D	TDZE 8
--------	----------	--------

2000	LAWNN	tr 345°	BRBRA	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 73).
------	-------	---------	-------	--

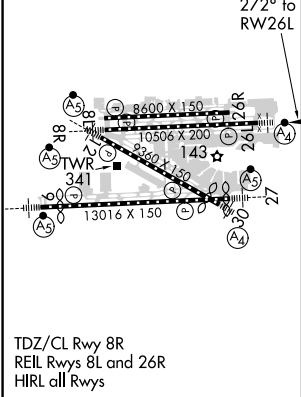

CATEGORY	A	B	C	D
LPV DA		208/40	200 (200-¾)	
LNAV/VNAV DA		348/45	340 (400-¾)	
LNAV MDA	560/40	552 (600-¾)	560-1⅓	552 (600-1⅓)

SE-3, 15 JUL 2021 to 12 AUG 2021

SE-3, 15 JUL 2021 to 12 AUG 2021