RNAV (GPS) RWY 18

MOBILE DOWNTOWN (BFM)

WAAS	APP CRS	Rwy Idg	7800
CH 97611	181°	TDZE	26
W18A		Apt Elev	26

T DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase all DA 50 feet and MDA 60 feet and increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats visibility ⅛ mile, increase LNAV Cat C/D visibility ¼ mile, and increase Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 13°C (56°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Mobile Rgnl altimeter setting.

A

MISSED APPROACH: Climb to 2000 direct POCIP and hold.

ATIS	MOBILE APP CON ★	DOWNTOWN TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

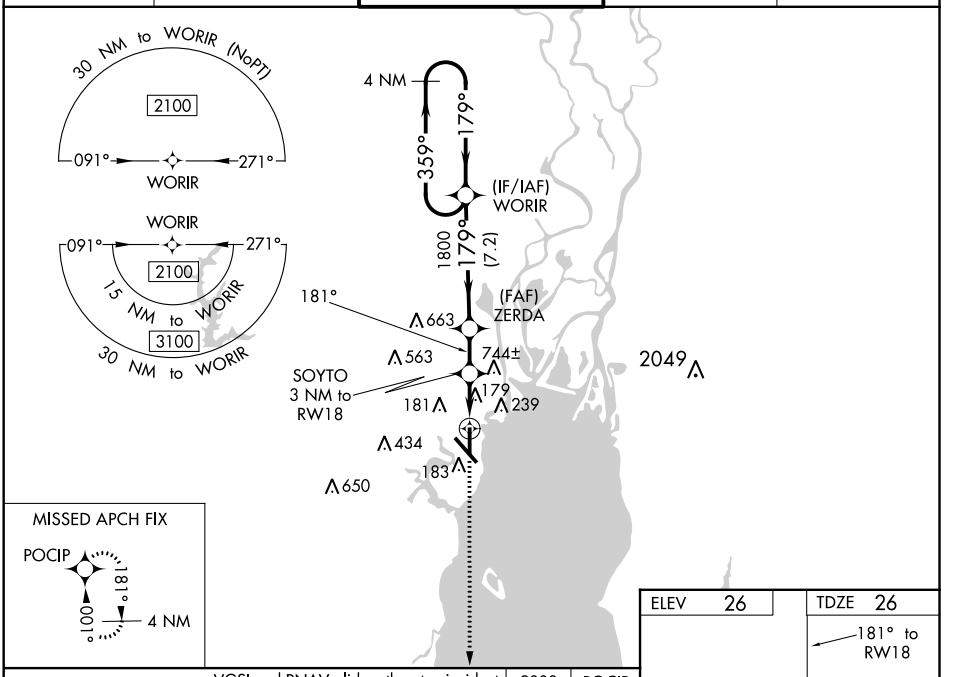

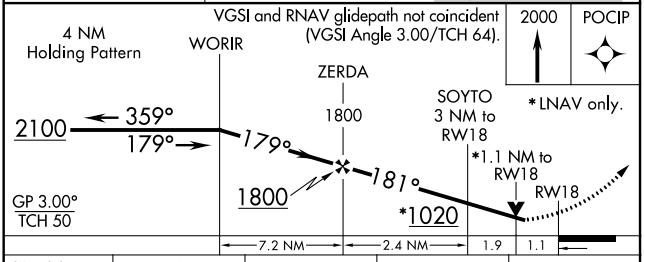

CATEGORY	A	B	C	D
LPV DA	276-¾	250 (300-¾)		
LNAV/VNAV DA	398-1¼	372 (400-1¼)		
LNAV MDA	440-1	414 (500-1)	440-1⅛	414 (500-1⅛)
C CIRCLING	680-1	654 (700-1)	680-1¾ 654 (700-1¾)	1100-3 1074 (1100-3)

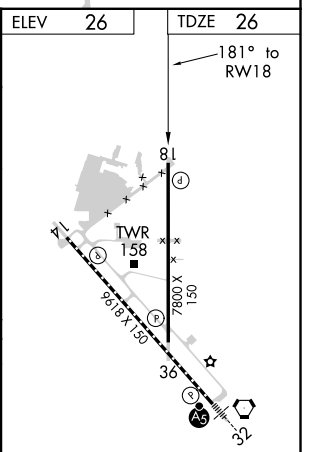

REIL Rwy 14
MIRL Rwy 18-36
HIRL Rwy 14-32
TDZ/CL Rwy 32

SE-4, 15 JUL 2021 to 12 AUG 2021
SE-4, 15 JUL 2021 to 12 AUG 2021