

# BAYPO NINE DEPARTURE (RNAV)



D-ATIS  
128.475  
CLNC DEL  
133.6  
CPDLC  
GND CON  
121.7 269.4  
TAMPA TOWER  
119.5 269.4  
TAMPA DEP CON  
118.8 239.3

**TOP ALTITUDE:  
6000**

### TAKEOFF MINIMUMS

Rwys 1L/1R, 10, 19L/R, 28: Standard with minimum climb of 500' per NM to 540.

- NOTE: RNAV 1
- NOTE: Jets only.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: WILON TRANSITION for use by aircraft filed to Jacksonville area airports only, or as assigned by ATC.

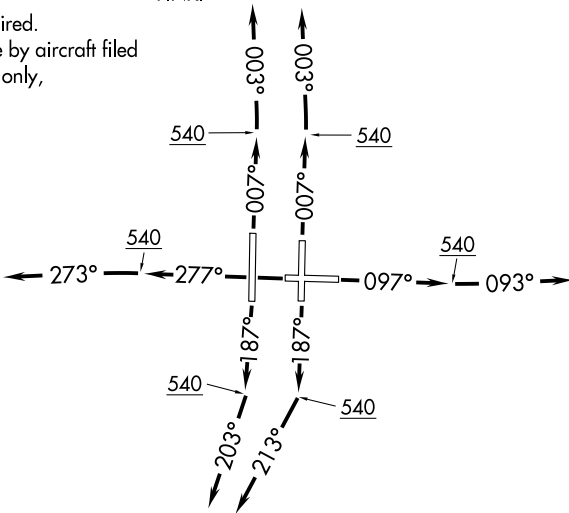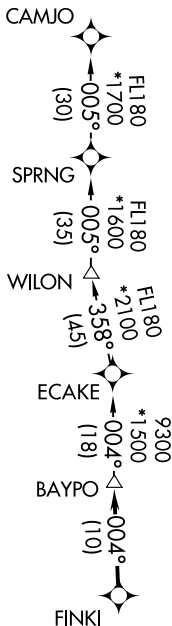

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

# BAYPO NINE DEPARTURE (RNAV)