

RNAV (RNP) Z RWY 10L


PALM BEACH INTL (PBI)

APP CRS 099°	Rwy Idg 8800
	TDZE 20
	Apt Elev 20



▼ For uncompensated Baro-VNAV systems, procedure NA below 2°C (36°F) or above 49°C (120°F). RF required. GPS required.
For inop MALSR, increase RNP 0.11 all Cats visibility to RVR 5000 and 0.30 all Cats visibility to RVR 6000.

MALSR MISSED APPROACH: Climb to 2000 on track 099° to JUTAS and right turn to ODKEY and on track 269° to LANCH and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6
-------------------------	--	--	-------------------------------	--------------------------

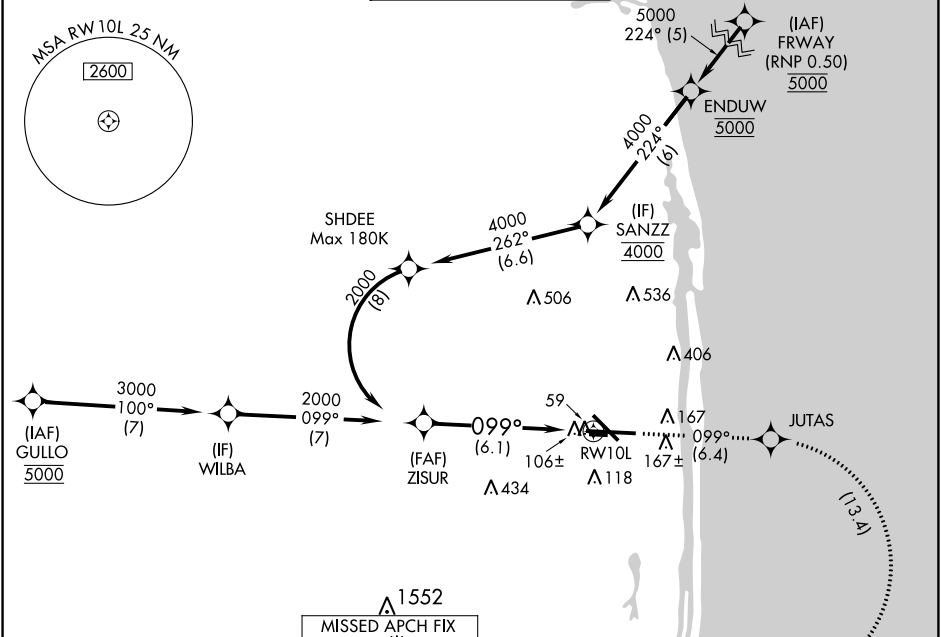

ELEV 20	D TDZE 20
---------	------------------

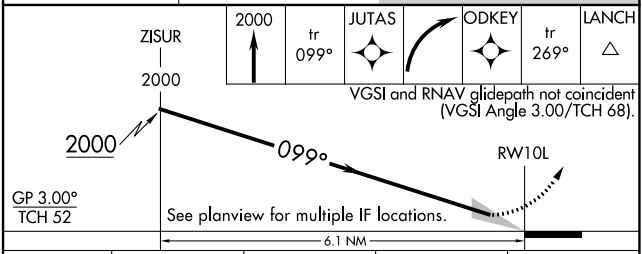

CATEGORY	A	B	C	D
RNP 0.11 DA		338/26	322 (400-½)	
RNP 0.30 DA		448/40	432 (500-¾)	

AUTHORIZATION REQUIRED

HIRL Rwy 10L-28R
REIL Rwy 10R, 14, 28L, 28R and 32
MIRL Rwy 14-32 and 10R-28L

SE-3, 15 JUL 2021 to 12 AUG 2021

SE-3, 15 JUL 2021 to 12 AUG 2021