WAAS	APP CRS	Rwy Idg	5000
CH 90405	219°	TDZE	2880
W22A		Apt Elev	2886

RNAV (GPS) RWY 22

LIBERAL MID-AMERICA RGNL (LBL)

RNP APCH.

Circling NA east of Rwy 17-35. Baro-VNAV NA when using Guymon Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA when using Guymon Muni altimeter setting. When local altimeter setting not received, use Guymon Muni altimeter setting: increase all DA 112 feet and all MDA 120 feet. Increase LPV all Cats visibilities ¼ SM; increase LNAV/VNAV all Cats visibility ⅜ SM; increase LNAV Cats C and D visibility ⅜ SM; Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 4800 direct PERDE and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.375	134.0 257.865	122.8 (CTAF) L

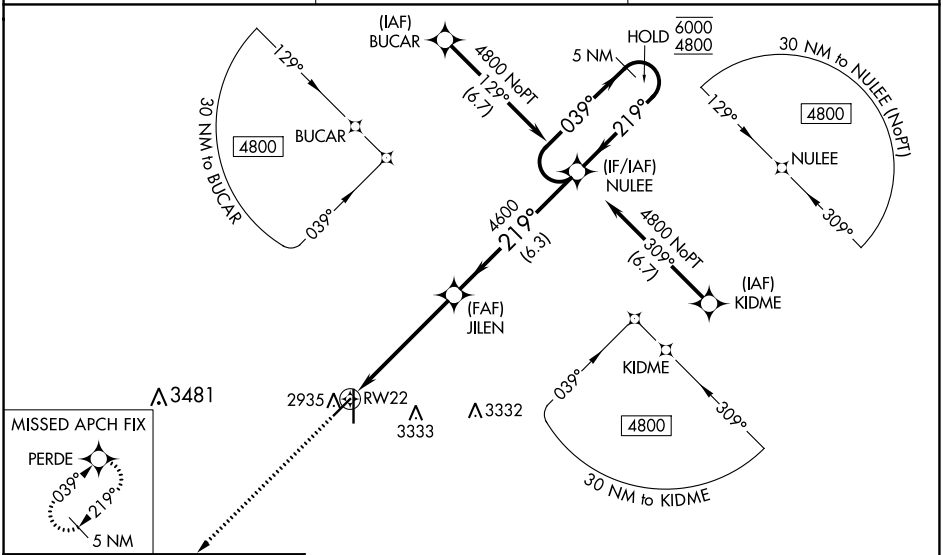

NC-2, 15 JUL 2021 to 12 AUG 2021

NC-2, 15 JUL 2021 to 12 AUG 2021

ELEV 2886 D TDZE 2880

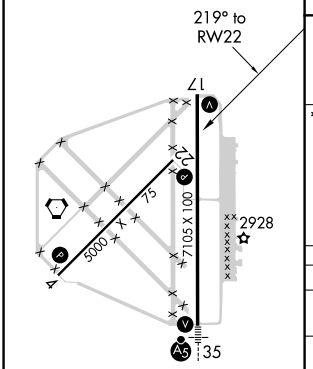

REIL Rwys 4, 17 and 22 L
MIRL Rwy 4-22 L
HIRL Rwy 17-35 L

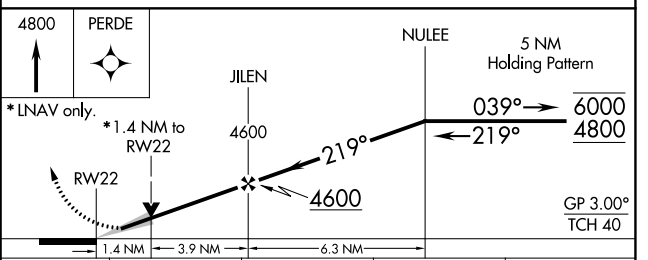

CATEGORY	A	B	C	D
LPV DA	3080-¾ 200 (200-¾)			
LNAV/VNAV DA	3168-⅞ 288 (300-⅞)			
LNAV MDA	3360-1 480 (500-1)		3360-1⅜ 480 (500-1⅜)	
C CIRCLING	3360-1 474 (500-1)	3360-1⅛ 474 (500-1⅛)	3360-1½ 474 (500-1½)	3440-2 554 (600-2)