RNAV (GPS) RWY 18

CORPUS CHRISTI INTL (CRP)

WAAS CH 53635 W18A	APP CRS 175°	Rwy Idg 6080 / TDZE 42 / Apt Elev 46

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR increase LPV Cat E visibility to ¾ mile, LNAV/VNAV Cat E visibility to 1 mile and LNAV Cat C/D/E visibility to 1¾ mile.

MALSR (A5)

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

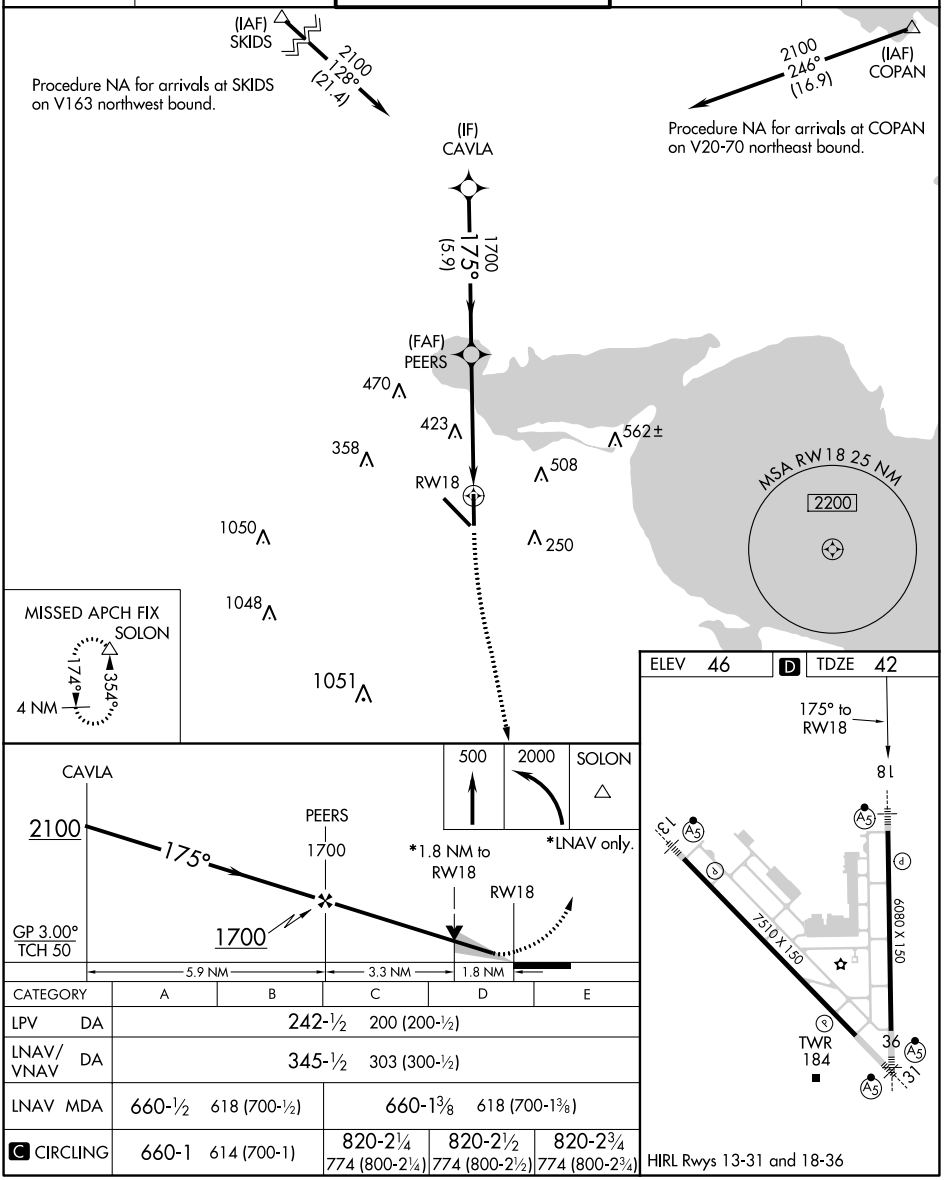

CATEGORY	A	B	C	D	E
LPV DA	242-½ 200 (200-½)				
LNAV/VNAV DA	345-½ 303 (300-½)				
LNAV MDA	660-½ 618 (700-½)		660-1⅜ 618 (700-1⅜)		
C CIRCLING	660-1 614 (700-1)		820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

SC-3, 15 JUL 2021 to 12 AUG 2021
SC-3, 15 JUL 2021 to 12 AUG 2021