VOR RWY 26R

CHINO (CNO)

VOR RAL	APP CRS	Rwy Idg	4858
112.4	264°	TDZE	636
		Apt Elev	650

Visibility reduction by helicopters NA.
When local altimeter setting not received, use Riverside Muni altimeter setting and increase all MDA 60 feet, increase HINTN FIX minimums S-26R and circling Cat B, C, and D visibility ¼ mile.

MISSED APPROACH: Climbing left turn to 4500 direct RAL VOR and hold, continue climb-in-hold to 4500.

ATIS	SOCAL APP CON	CHINO TOWER ★	GND CON	UNICOM
125.85	135.4 318.2	118.5 (CTAF)	121.6	122.95

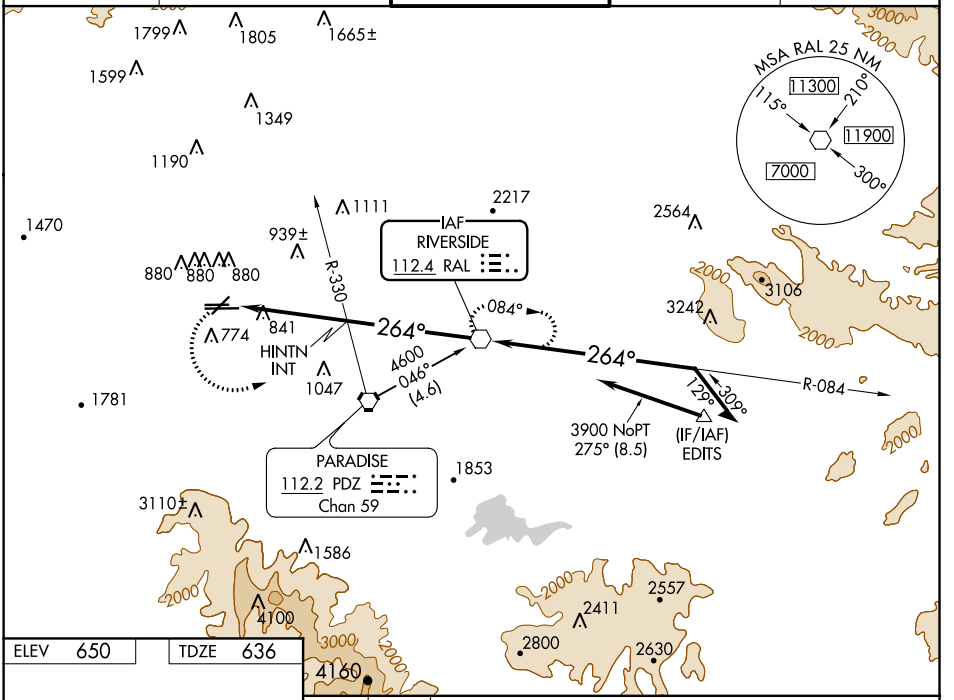

ELEV	650	TDZE	636



REIL Rwys 3 and 21
MIRL Rwys 3-21 and 8R-26L
HIRL Rwy 8L-26R

FAF to MAP 9.1 NM					
Knots	60	90	120	150	180
Min:Sec	9:06	6:04	4:33	3:38	3:02

4500	RAL

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 53).

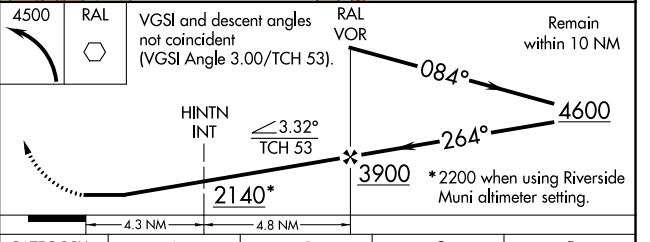

*2200 when using Riverside Muni altimeter setting.

CATEGORY	A	B	C	D
S-26R	2140-1¼ 1504 (1500-1¼)	2140-1½ 1504 (1500-1½)	2140-3 1504 (1500-3)	
CIRCLING	2140-1¼ 1490 (1500-1¼)	2140-1½ 1490 (1500-1½)	2140-3 1490 (1500-3)	
HINTN FIX MINIMUMS				
S-26R	1320-1 684 (700-1)		1320-2 684 (700-2)	1320-2¼ 684 (700-2¼)
CIRCLING	1320-1 670 (700-1)		1320-2 670 (700-2)	1320-2¼ 670 (700-2¼)

SW-3, 15 JUL 2021 to 12 AUG 2021
SW-3, 15 JUL 2021 to 12 AUG 2021