RNAV (GPS) Z RWY 4R

DETROIT METRO WAYNE COUNTY (DTW)

WAAS	APP CRS	Rwy Idg	11494
CH 63004	036°	TDZE	640
W04B		Apt Elev	645

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C or above 54° C. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct LUPAY and hold.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

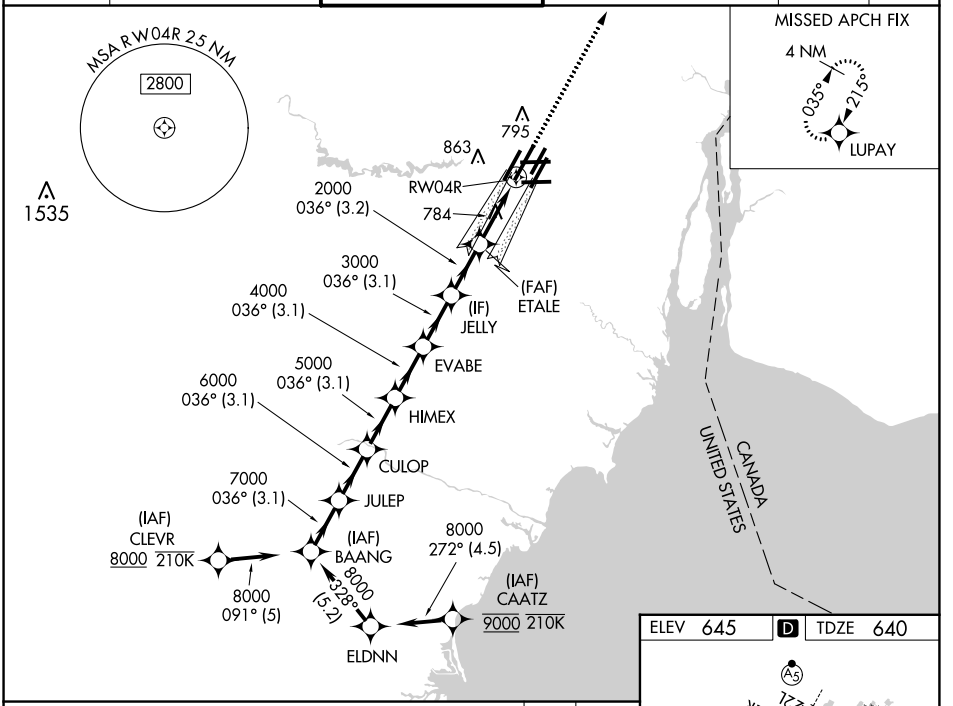

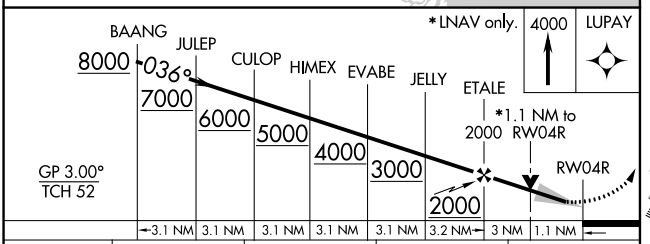

CATEGORY	A	B	C	D
LPV DA	840/18 200 (200-½)			
LNAV/VNAV DA	1021/35 381 (400-⅝)			
LNAV MDA	1040/24 400 (400-½)		1040/35 400 (400-⅝)	
C CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½)	1240-2 595 (600-2)

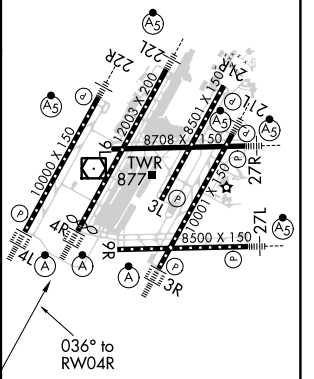

TDZ/CL Rwys 3R, 4L, 4R and 22R
REIL Rwys 3L, 9L, 9R and 21R
HIRL all runways

EC-1, 09 SEP 2021 to 07 OCT 2021
EC-1, 09 SEP 2021 to 07 OCT 2021