ILS or LOC RWY 32
MOBILE DOWNTOWN (BFM)

LOC/DME I-RUJ	APP CRS	Rwy Idg	9618
108.5	320°	TDZE	25
Chan 22		Apt Elev	26

DME or radar required. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet, increase S-LOC 32 Cat C/D visibility ½ mile and Circling Cat C visibility ¼ mile, increase DEXOW fix minimums S-LOC 32 Cats C/D visibility ⅛ mile. For inop MALSR increase S-ILS 32 all Cats visibility to RVR 4000. VDP NA when using Mobile Rgnl altimeter setting.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 030° and SJI R-058 to STETS INT/SJI 35.9 DME and hold.

ATIS	MOBILE APP CON ★	DOWNTOWN TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

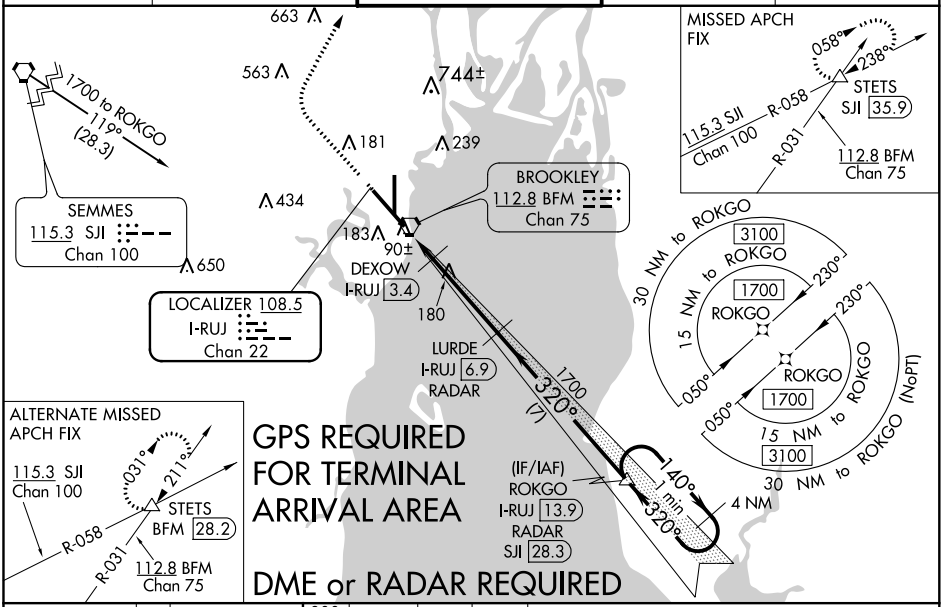

ELEV 26	TDZE 25



FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

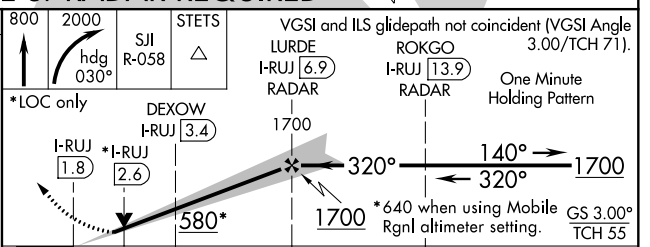

CATEGORY	A	B	C	D
S-ILS 32	225/18 200 (200-½)			
S-LOC 32	580/24 555 (600-½)		580-1¼ 555 (600-1¼)	
C CIRCLING	680-1 654 (700-1)		680-1¾ 654 (700-1¾)	1100-3 1074 (1100-3)
DEXOW FIX MINIMUMS				
S-LOC 32	340/24 315 (400-½)		340/26 315 (400-½)	
C CIRCLING	680-1 654 (700-1)		680-1¾ 654 (700-1¾)	1100-3 1074 (1100-3)

SE-4, 09 SEP 2021 to 07 OCT 2021