ILS Y or LOC Y RWY 33

CRAIG FIELD (SEM)

LOC/DME I-SEM	APP CRS	Rwy Idg	8014
110.5	329°	TDZE	165
Chan 42		Apt Elev	166

T A For inoperative MALS, increase S-LOC 33 Cat D visibility to 1⅝ and increase ZEMUM fix minimums S-LOC 33 Cats C and D visibility to 1⅛ mile. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase DA 78 feet, all MDA 80 feet, increase S-LOC 33 Cats C and D visibility ⅛ mile, Circling Cat C visibility ½ mile and Circling Cat D visibility ¼ mile, increase ZEMUM fix minimums S-LOC 33 Cats C and D visibility ⅛ mile and Circling Cat C visibility ½ mile and Circling Cat D visibility ¼ mile. For inoperative MALS, when using Montgomery altimeter setting, increase S-ILS 33 all Cats visibility to ⅞ mile, S-LOC 33 Cats C and D visibility to 1¾ mile and increase ZEMUM fix minimums Cats C and D visibility to 1⅜ mile. ADF required.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 3100 direct POLLK LOM/I-SEM 6.2 DME/ RADAR and hold, continue climb-in-hold to 3100.

AWOS-3PT	MONTGOMERY APP CON ★	UNICOM
119.15	124.0 363.025	122.7 (CTAF) L

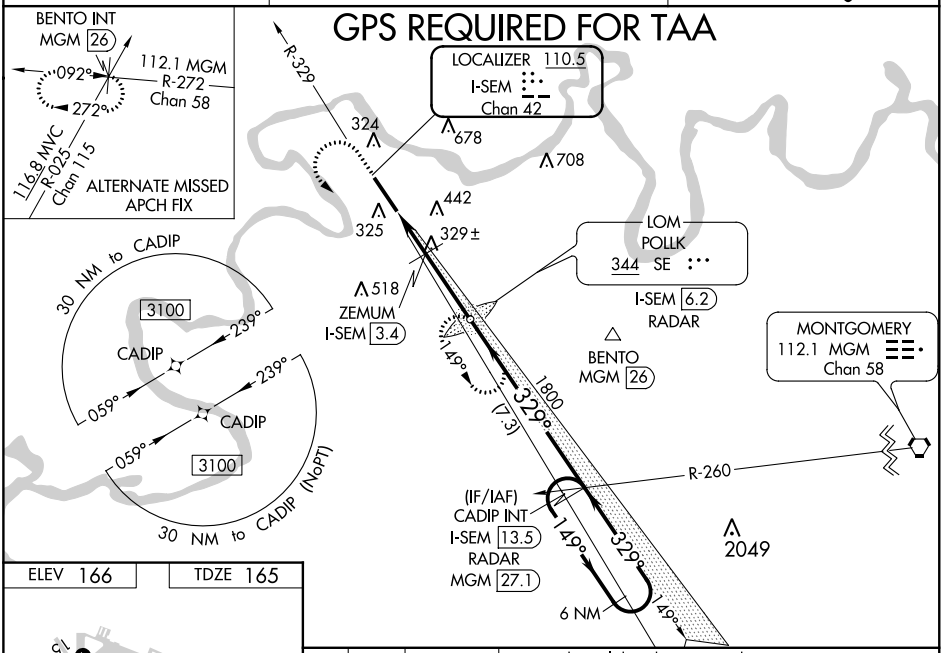

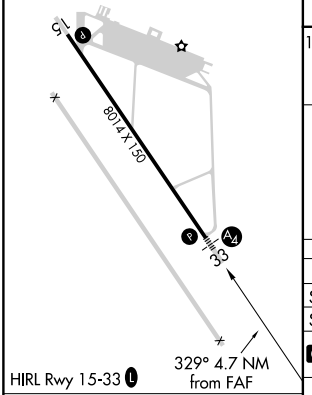

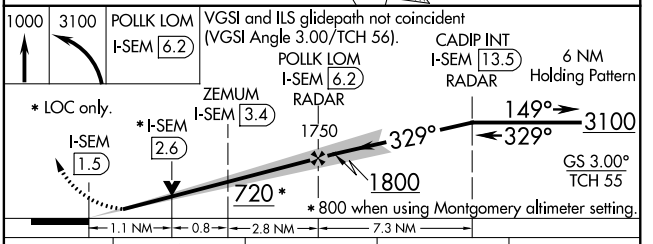

CATEGORY	A	B	C	D
S-ILS 33	365-¾ 200 (200-¾)			
S-LOC 33	720-¾ 555 (600-¾)		720-1⅜ 555 (600-1⅜)	
C CIRCLING	720-1 554 (600-1)	760-1 594 (600-1)	760-1½ 594 (600-1½)	1040-2¾ 874 (900-2¾)
ZEMUM FIX MINIMUMS				
S-LOC 33	580-¾ 415 (500-¾)		580-1	415 (500-1)
C CIRCLING	660-1 494 (500-1)	760-1 594 (600-1)	760-1½ 594 (600-1½)	1040-2¾ 874 (900-2¾)

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

SE-4, 09 SEP 2021 to 07 OCT 2021
SE-4, 09 SEP 2021 to 07 OCT 2021