WAAS	APP CRS	Rwy Idg	9000
CH 86314	005°	TDZE	90
W35A		Apt Elev	96

RNAV (GPS) RWY 35R

ORLANDO INTL (MCO)

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D visibility to RVR 5500. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	
ARR 121.25	124.8 307.0	118.45 253.5 (Rwys 17L-35R,17R-35L)	126.4 (East)	134.7	CPDLC
DEP 120.525		124.3 253.5 (Rwys 18L-36R,18R-36L)	121.8 (West)	341.7	

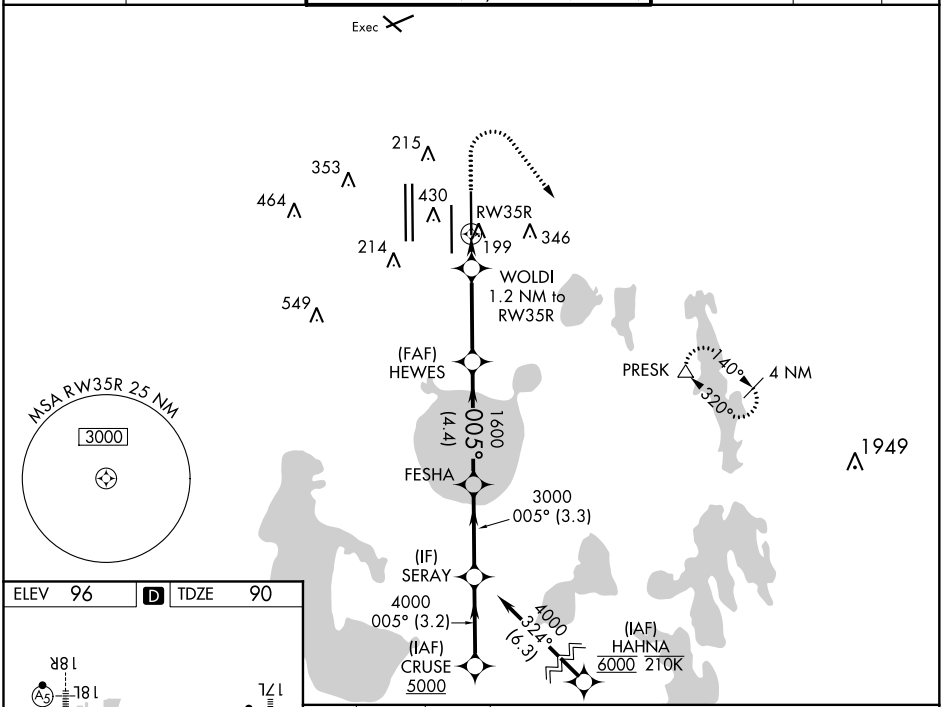

ELEV 96 | D | TDZE 90

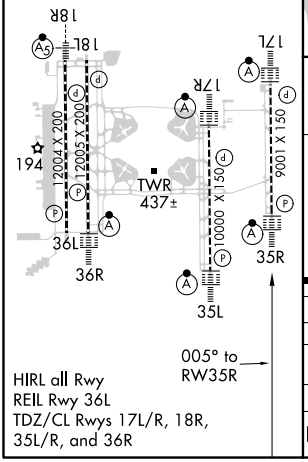

HIRL all Rwy
REIL Rwy 36L
TDZ/CL Rwys 17L/R, 18R, 35L/R, and 36R

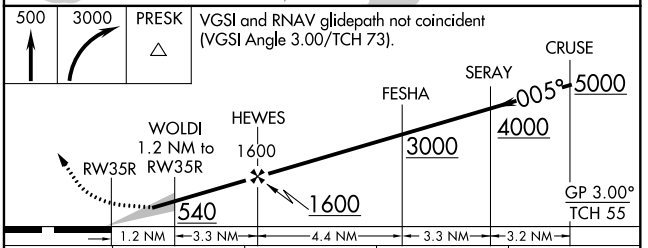

CATEGORY	A	B	C	D
LPV DA	290/18 200 (200-½)			
LNAV/VNAV DA	360/24 270 (300-½)			
LNAV MDA	460/24 370 (400-½)		460/35 370 (400-⅝)	
C CIRCLING	740-1 644 (700-1)		740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 09 SEP 2021 to 07 OCT 2021
SE-3, 09 SEP 2021 to 07 OCT 2021