ILS or LOC/DME RWY 27

ESLER RGNL (ESF)

LOC I-ESF 111.5 Chan 52	APP CRS 270°	Rwy Idg 5999 TDZE 92 Apt Elev 112

RADAR or DME required.

T NA Circling Rwy 14, 32 NA at night. VDP NA with Alexandria Intl altimeter setting. When local altimeter not received, use Alexandria Intl altimeter setting and increase DA to 327 feet; increase all MDA to 40 feet and Circling visibility Cat D ¼ SM. For inop MALSR, increase S-LOC 27 Cat C/D visibility to 1 SM.

MALSR A5

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 120° and on AEX VORTAC R-067 to LARTO/ AEX 24.1 DME/RADAR and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) L

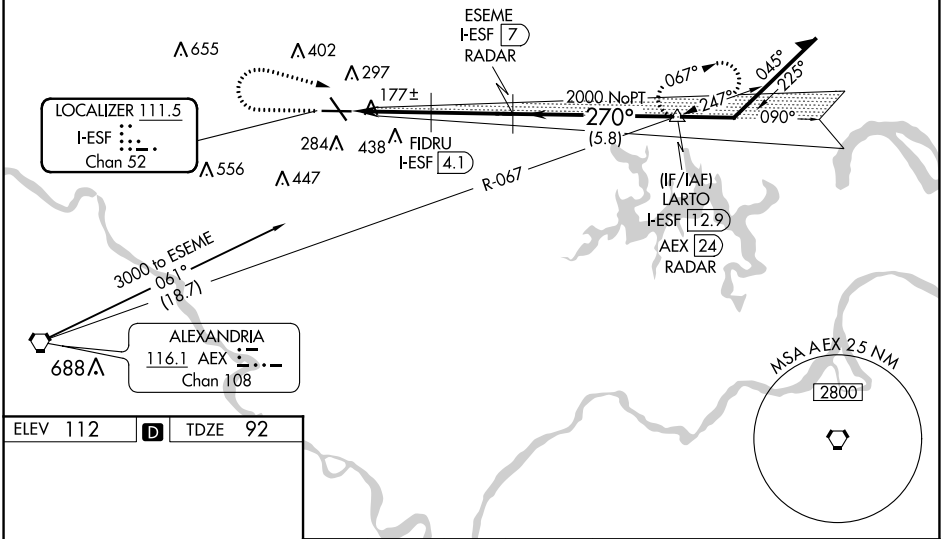

ELEV 112 D TDZE 92



1500	3000	AEX R-067	LARTO AEX 24.1 RADAR
	hdg 120°		

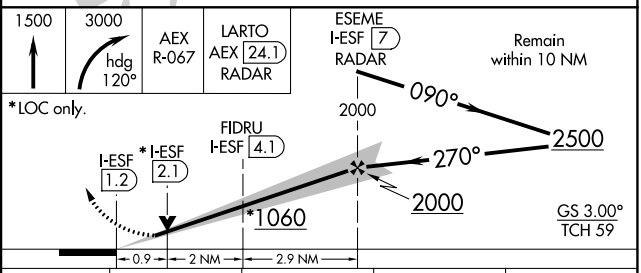

CATEGORY	A	B	C	D
S-ILS 27	292-½ 200 (200-½)			
S-LOC 27	440-½ 348 (400-½)		440-⅝ 348 (400-⅝)	
CIRCLING	600-1 488 (500-1)		740-1¾ 628 (700-1¾)	760-2 648 (700-2)

REIL Rwys 9, 14 and 32 L
MIRL Rwy 14-32 L
HIRL Rwy 9-27 L

SC-4, 09 SEP 2021 to 07 OCT 2021
SC-4, 09 SEP 2021 to 07 OCT 2021