

| | | | |
|----------------------------------------|------------------------|-----------------------------|----------------------------------------|
| WAAS CH 56425 W29A | APP CRS 294° | Rwy Idg TDZE Apt Elev | 4461 97 103 |
|----------------------------------------|------------------------|-----------------------------|----------------------------------------|

RNAV (GPS) RWY 29R


ZAMPERINI FLD (TOA)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C (38°F) or above 54°C (130°F). Circling NA southwest of Rwy 11R-29L. DME/DME RNP-0.3 NA.
▲ For inop ALS, increase LPV all Cats visibility to ½ SM. For inop ALS when using Los Angeles Intl altimeter setting, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 2 SM, and LNAV Cat C visibility to 1¾ SM. Baro-VNAV and VDP NA when using Los Angeles Intl altimeter setting. When local altimeter setting not received, except for operators with approved weather reporting service, use Los Angeles Intl setting: increase LPV DA to 391 feet and LNAV/VNAV DA to 763 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C visibility ½ SM.



MALSRL

MISSED APPROACH: (Do not exceed 185 KIAS until ZANAN) Climb to 3000 direct ZANAN and on track 221° to INISH and hold, continue climb-in-hold to 3000.

| | | | | |
|----------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------|-------------------------|
| ATIS 125.6 | SOCAL APP CON 124.3 363.2 (Rwys 11L, 11R) 127.2 269.6 (Rwys 29L, 29R) | TORRANCE TOWER* 133.075 257.8 (NORTH) 124.0 (CTAF) 257.8 (SOUTH) | GND CON 120.9 | UNICOM 122.95 |
|----------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------|-------------------------|

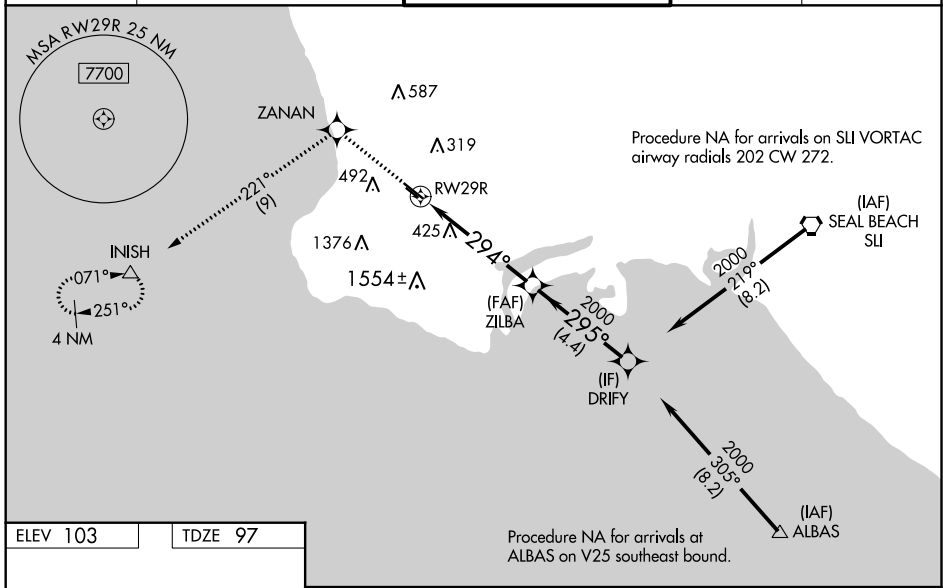

| | |
|----------|---------|
| ELEV 103 | TDZE 97 |
|----------|---------|

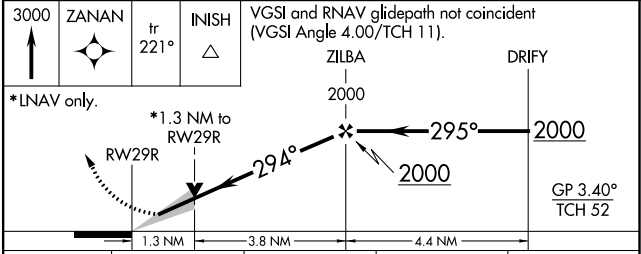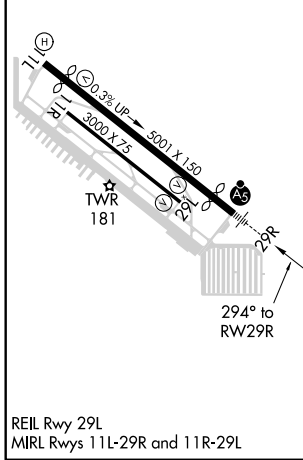

| CATEGORY | A | B | C | D |
|-------------------|--------|-------------|------------------------|----|
| LPV DA | 367-½ | | 270 (300-½) | NA |
| LNAV/VNAV DA | 739-1½ | | 642 (700-1½) | NA |
| LNAV MDA | 680-½ | 583 (600-½) | 680-1¼ 583 (600-1¼) | NA |
| C CIRCLING | 680-1 | 577 (600-1) | 680-1¾ 577 (600-1¾) | NA |