

WAAS CH 69509 W27A	APP CRS 275°	Rwy Idg 5108 TDZE 455 Apt Elev 461
--	------------------------	---




RNAV (GPS) RWY 27

CRAWFORD COUNTY (RSV)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
 ▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Terre Haute Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet; increase LPV all Cats visibility 1/8 mile, increase LNAV/VNAV all Cats visibility 3/8 mile, increase LNAV Cats C/D 1/4 mile and increase Circling Cats C/D 1/2 mile. Baro-VNAV and VDP NA when using Terre Haute Rgnl altimeter setting.

MISSED APPROACH: Climb to 3000 direct PULLOY and hold.

AWOS-3 120.50	HULMAN APP CON 119.25 339.8	UNICOM 123.0 (CTAF) 0
-------------------------	---------------------------------------	---------------------------------

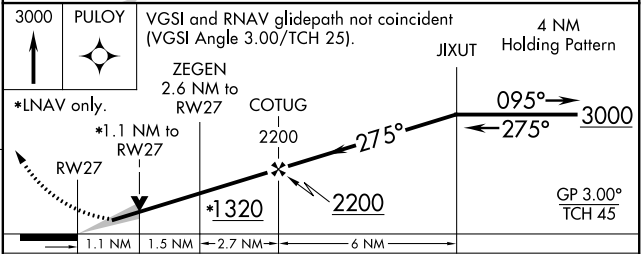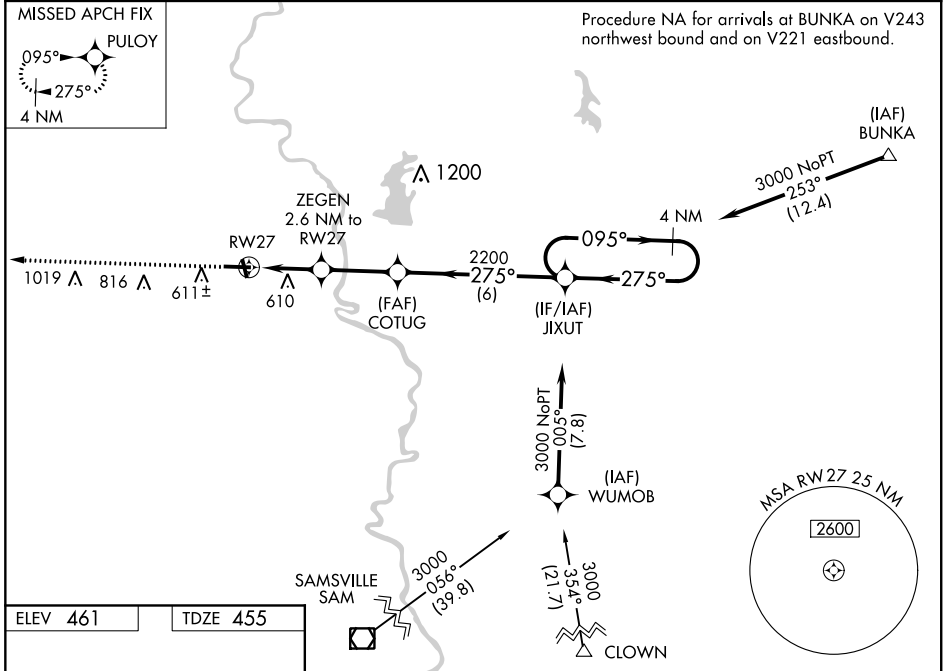

CATEGORY	A	B	C	D
LPV DA	705-1		250 (300-1)	
LNAV/VNAV DA	845-1 1/4		390 (400-1 1/4)	
LNAV MDA	840-1 385 (400-1)		840-1 1/8 385 (400-1 1/8)	
<input checked="" type="checkbox"/> CIRCLING	940-1 479 (500-1)	1080-1 619 (700-1)	1120-1 3/4 659 (700-1 3/4)	1180-2 1/4 719 (800-2 1/4)

EC-3, 09 SEP 2021 to 07 OCT 2021

EC-3, 09 SEP 2021 to 07 OCT 2021