

LOC I-VDI 110.3	APP CRS 249°	Rwy Idg TDZE Apt Elev	6002 273 274
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 25

VIDALIA RGNL (VDI)



NA When local altimeter setting not received, use Baxley altimeter setting and increase all DAs 77 feet and all MDAs 80 feet, increase S-LOC 25 Cat C/D visibility 1/8 mile, Circling Cat C/D visibility 1/4 mile. For inop MALSRL, increase S-LOC 25 Cat C/D visibility to 1 1/8 mile. For inop MALSRL, when using Baxley altimeter setting increase S-ILS 25 all Cats visibility to 3/8 mile. Night landing Rwy 32 NA. ADF required.

MALSRL MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct UQN NDB and hold.

AWOS-3 119.925	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

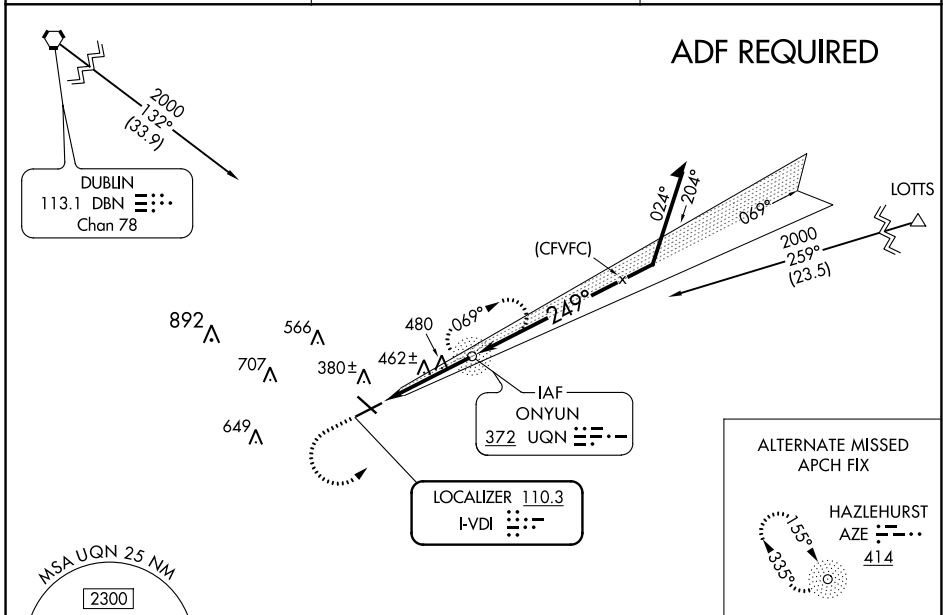

ELEV 274	TDZE 273
----------	----------

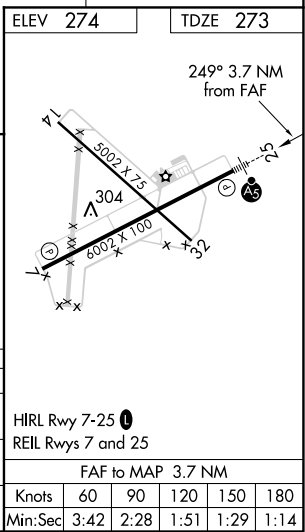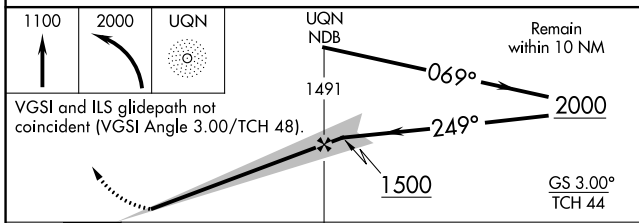

CATEGORY	A	B	C	D
S-ILS 25	473-1/2		200 (200-1/2)	
S-LOC 25	740-1/2	467 (500-1/2)	740-1	467 (500-1)
C CIRCLING	740-1	466 (500-1)	920-1 3/4 646 (700-1 3/4)	1060-2 1/2 786 (800-2 1/2)

SE-4, 09 SEP 2021 to 07 OCT 2021

SE-4, 09 SEP 2021 to 07 OCT 2021