

NDB OOC 407	APP CRS 343°	Rwy Idg 5003
		TDZE 121
		Apt Elev 121




NDB RWY 35

NATCHITOCHE RGNL (IER)

NA Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: Increase all MDA 100 feet and S-35 Cat C visibility 1/8 SM and Circling Cat C visibility 1/2 SM. For inoperative ODALS increase S-35 Cat C visibility 1/8 mile. Inoperative table does not apply to S-35 Cat A/B.

ODALS MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OOC NDB and hold.

AWOS-3 119.025	POLK APP CON 125.4 302.2	GCO 135.075	UNICOM 122.8(CTAF)
--------------------------	------------------------------------	-----------------------	------------------------------

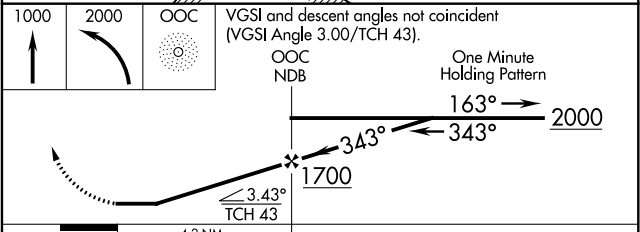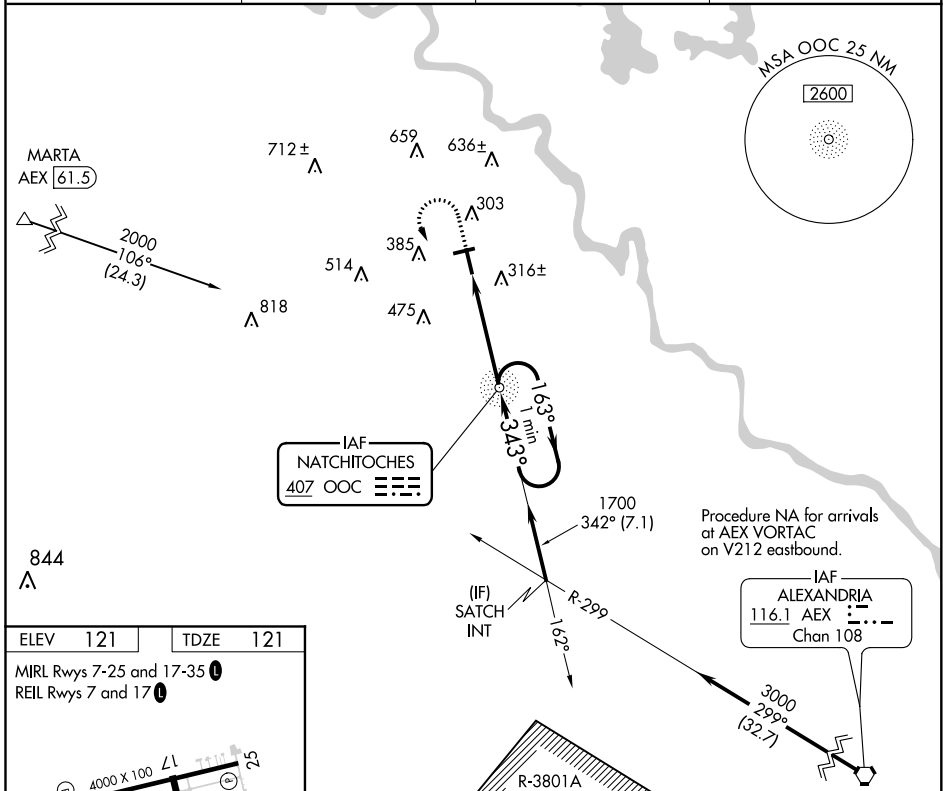

FAF to MAP 4.2 NM

ELEV	121	TDZE	121		
MIRL Rwy	7-25 and 17-35				
REIL Rwy	7 and 17				
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

CATEGORY	A	B	C	D
S-35	720-1	599 (600-1)	720-1 1/2 599 (600-1 1/2)	NA
CIRCLING	720-1 599 (600-1)	740-1 619 (700-1)	860-2 739 (800-2)	NA

SC-4, 09 SEP 2021 to 07 OCT 2021

SC-4, 09 SEP 2021 to 07 OCT 2021