


LOC I-RYY	APP CRS	Rwy ldg	5374
111.9	273°	TDZE	1011
		Apt Elev	1040



ILS or LOC RWY 27

COBB COUNTY INTL-MCCOLLUM FLD (RYY)

RADAR required for procedure entry.				MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 050° and ATL VORTAC R-351 to FENTS INT/ RMG 26.2 DME and hold, continue climb-in-hold to 4000.	
⚠ Circling to Rwy 9 NA at night. When local altimeter setting not received, use Hartsfield-Jackson Atlanta Intl altimeter setting and increase all DA/MDA 60 feet; increase S-ILS 27 all Cats and CUMAV Fix Minimums S-LOC 27 Cats C and D visibility 1/8 mile; increase S-LOC 27 Cat B, Circling Cat C, and CUMAV Fix Minimums Circling Cat C visibility 1/4 mile; increase S-LOC 27 Cats C and D visibility 1/2 mile.				MALSF	
ATIS	ATLANTA APP CON	MCCOLLUM TOWER ★	GND CON	CLNC DEL	UNICOM
128.125	121.0 268.7	125.9 (CTAF) 0	119.0	119.0 268.7	122.7

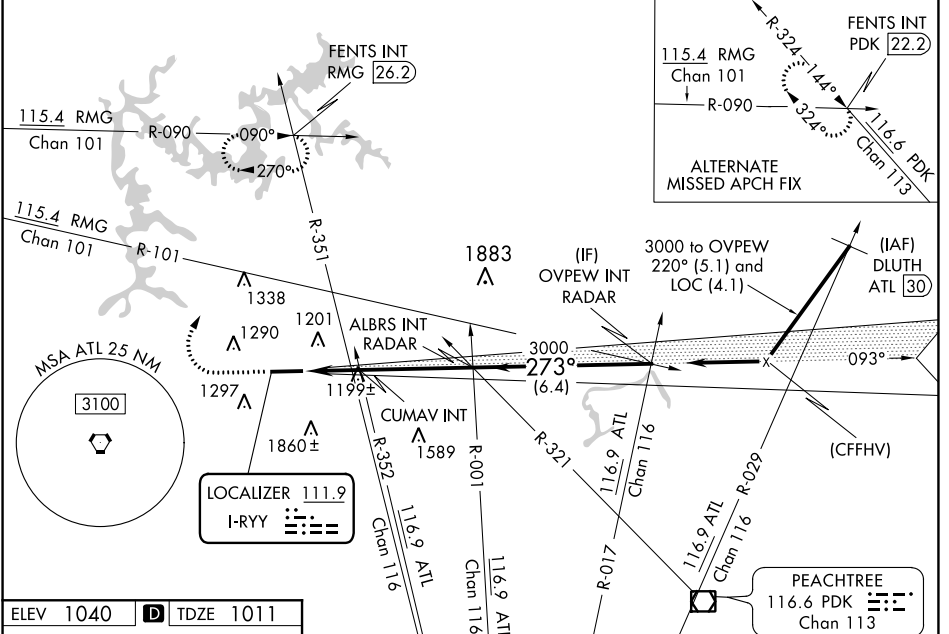

ELEV 1040	D	TDZE 1011
-----------	---	-----------

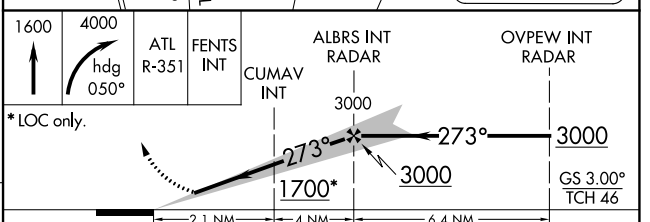

CATEGORY	A	B	C	D
S-ILS 27	1211-3/4 200 (200-3/4)			
S-LOC 27	1700-1	689 (700-1)	1700-2	689 (700-2)
CIRCLING	1780-1	740 (800-1)	1780-2 740 (800-2)	2220-3 1180 (1200-3)
CUMAV FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 27	1460-1	449 (500-1)	1460-1 3/8	449 (500-1 3/8)
CIRCLING	1780-1	740 (800-1)	1780-2 740 (800-2)	2220-3 1180 (1200-3)

HIRL Rwy 9-27 0

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SE-4, 09 SEP 2021 to 07 OCT 2021

SE-4, 09 SEP 2021 to 07 OCT 2021