

# RNAV (RNP) Z RWY 15

CHARLESTON AFB/INTL (CHS)





APP CRS	Rwy Idg	<b>9001</b>
<b>154°</b>	TDZE	<b>43</b>
	Apt Elev	<b>46</b>

**▼** For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required. For inop ALSF, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.



**MISSED APPROACH:** Climb to 3000 on track 154° to SHRMP and hold.

ATIS <b>124.75</b>	CHARLESTON APP CON <b>120.7 306.925</b>	CHARLESTON TOWER <b>126.0 239.0</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>127.325 291.65</b>	CPDLC
-----------------------	--	--	-------------------------------	-----------------------------------	-------

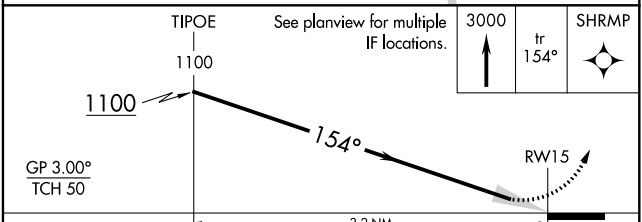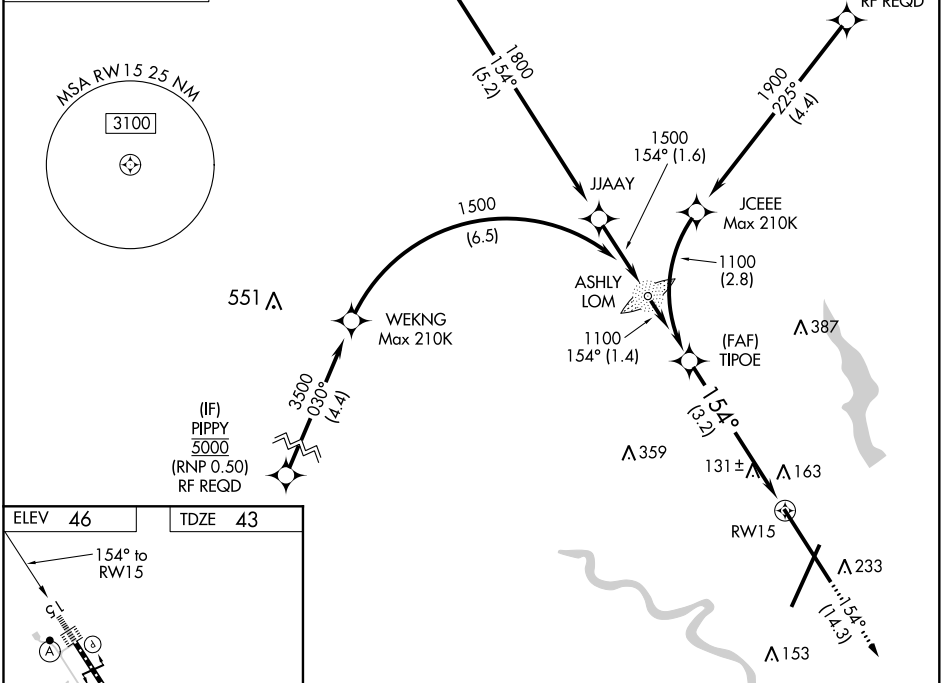

CATEGORY	A	B	C	D
RNP 0.11 DA		315/24	272 (300-½)	
RNP 0.30 DA		428/45	385 (400-¾)	

## AUTHORIZATION REQUIRED

SE-2, 07 OCT 2021 to 04 NOV 2021

SE-2, 07 OCT 2021 to 04 NOV 2021