WAAS CH 63218 W33A	APP CRS 334°	Rwy Idg 9001 / TDZE 45 / Apt Elev 46

RNAV (GPS) Y RWY 33

CHARLESTON AFB/INTL (CHS)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.

ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

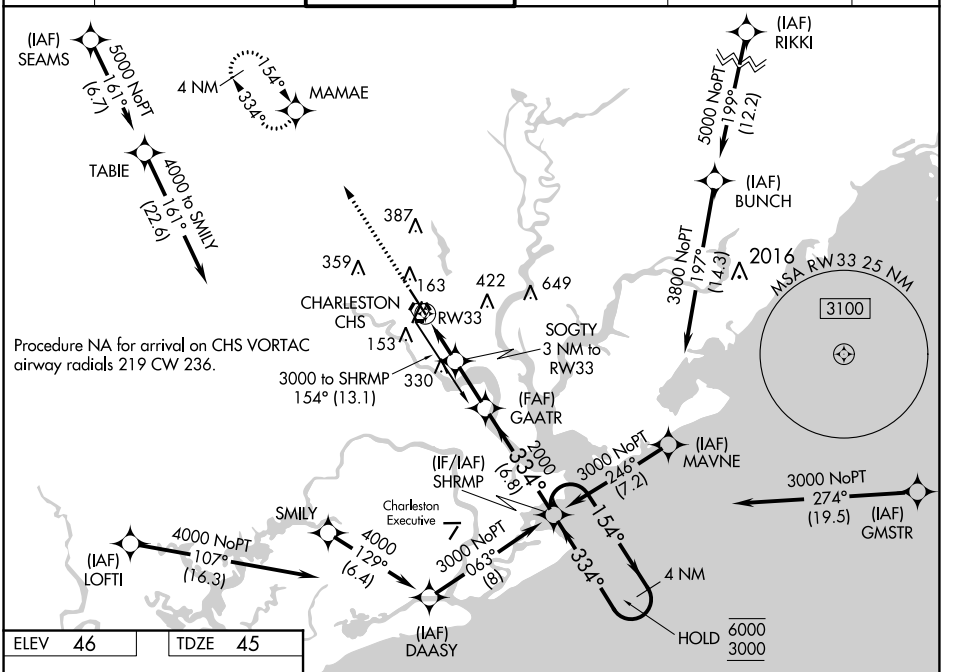

ELEV 46	TDZE 45

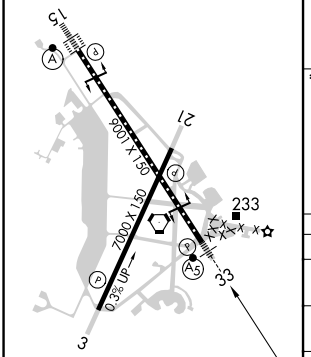

TDZ/CL Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33

334° to RW33

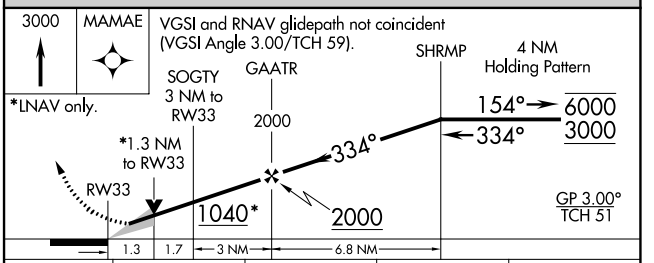

CATEGORY	A	B	C	D
LPV DA #	245/24 200 (200-½)			
LNAV/VNAV DA	472/40 427 (500-¾)			
LNAV MDA	500/24 455 (500-½)		500/45 455 (500-⅞)	
C CIRCLING	540-1 494 (500-1)		540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)

SE-2, 07 OCT 2021 to 04 NOV 2021
SE-2, 07 OCT 2021 to 04 NOV 2021