HOUSTON, TEXAS

HI-ILS Y or LOC Y RWY 35L

LOC I-EFD	APCH CRS	Rwy Idg / TDZE / Arpt Elev
111.1	354°	9001 / 28 / 33

AL-197 [USAF] ELLINGTON (KEFD)

DME required. RADAR required for procedure entry.

▼ * When ALS inop, increase CAT CDE RVR to 60.
** Circling not authorized W of rwy 17L-35R

MALSF

MISSED APPROACH: Climb to 500 then climbing right turn to 3100 via EFD TACAN R-136 to WATFO INT/EFD 16 DME and hold.

ATIS	HOUSTON APP CON	TOWER	GND CON
135.575 269.9	134.45 284.0	126.05 253.5	121.6 275.8

EFD TACAN	N29°36.36′ W95°09.58′
CANDI	N29°39.24′ W95°18.17′
DROPP	N29°13.63′ W95°32.07′
WATFO	N29°23.90′ W94°58.07′

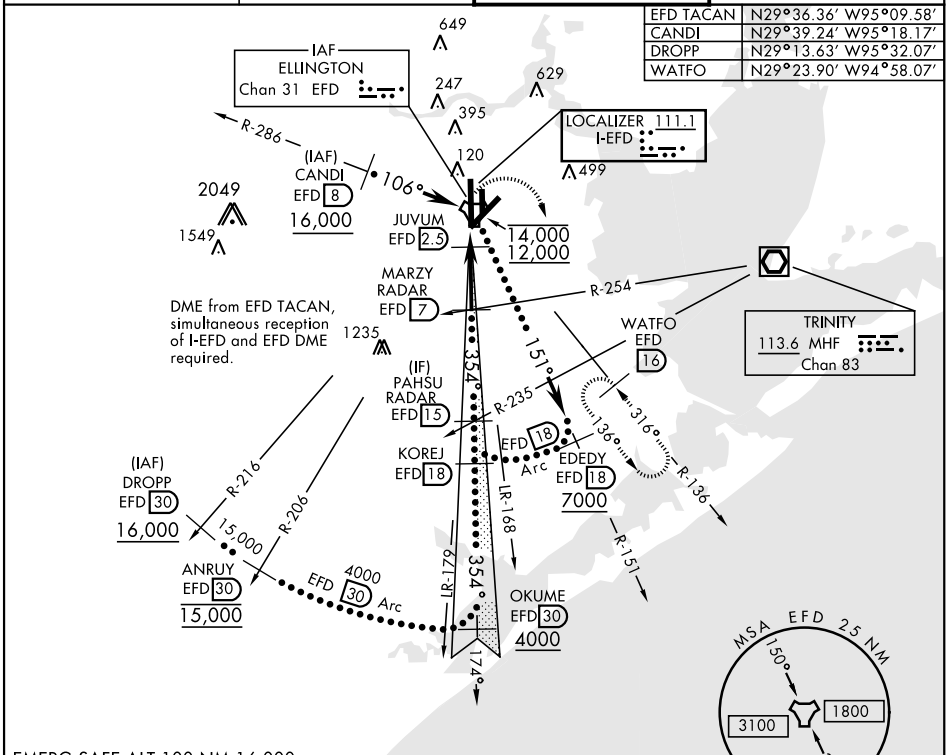

EMERG SAFE ALT 100 NM 16,000

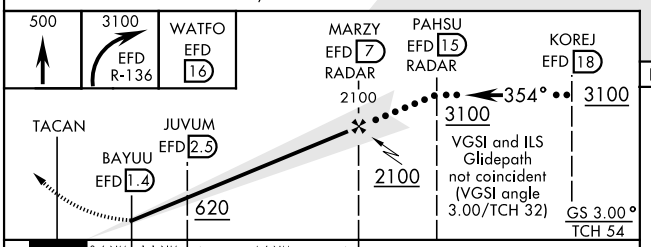

CATEGORY	C	D	E
S-ILS 35L	228/40	200	(200-¾)
S-LOC 35L *	440/50	412	(500-1)
C CIRCLING **	580-1½ 547 (600-1½)	640-2 607 (700-2)	700-2¼ 667 (700-2¼)

ELEV 33 D TDZE 28



HOUSTON, TEXAS 29°36′N-95°10′W ELLINGTON (KEFD)

Amdt 4A 15AUG19

HI-ILS Y or LOC Y RWY 35L

SC-5, 07 OCT 2021 to 04 NOV 2021