RNAV (GPS) Y RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

WAAS	APP CRS	Rwy Idg	12001
CH 86809	274°	TDZE	875
W27A		Apt Elev	896

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C.

**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct SEMSE then via 218° track to AVIEW and hold.

D-ATIS ARR	D-ATIS DEP	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL
134.375	135.3	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	121.7	127.175

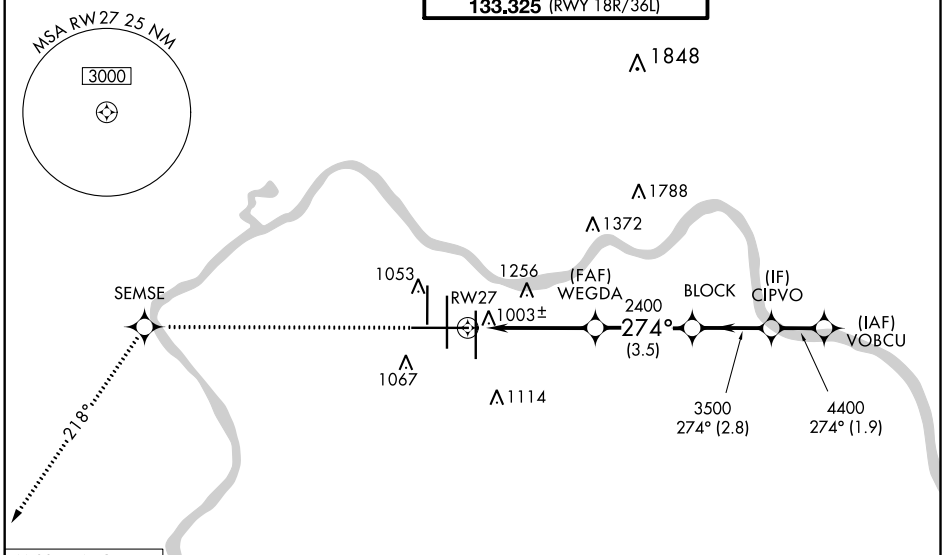

MISSED APCH FIX
4 NM
064°
244°
AVIEW

RADAR REQUIRED

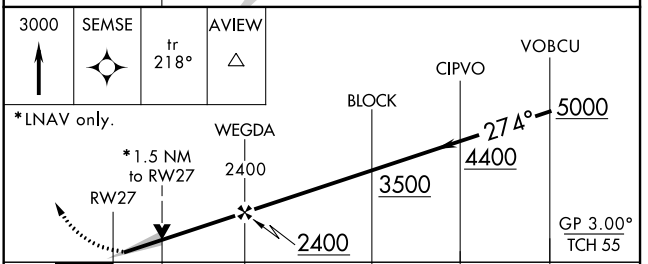

CATEGORY	A	B	C	D
LPV DA		**1075/24 200 (200-½)		
LNAV/VNAV DA		1349/60 474 (500-1¼)		
LNAV MDA	1420/24 545 (600-½)		1420/60 545 (600-1¼)	
CIRCLING	1460-1 564 (600-1)		1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)

ELEV 896 D TDZE 875



HIRL all Rwys
TDZ/CL all Rwys except 27

SE-1, 07 OCT 2021 to 04 NOV 2021
SE-1, 07 OCT 2021 to 04 NOV 2021